RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: QAW529CC
General light, Emergency light Centralised power supply systems
Universal, CoreCompact 24 (CC), CPS, IP20, Aluminum, White



Round metal luminaire for general-purpose lighting and illuminating escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

This luminaire is designed for central battery operation. In mains operation, the LED luminaire is run at 26W, 2300lm, 4000 K.

The performance data stated relates to the in-built emergency luminaire.

Control and monitoring via central 24 V low-power system.

CE


More information
www.rp-group.com/en/item/QAW529CC

TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminum
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	2,8 W
Power maintained	2,8 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-20 °C to 30 °C

Ambient temperature non-maintained mode	-20 °C to 40 °C
Height	113 mm
Diameter	395 mm
Weight	0.7
Weight incl. packaging	1.02
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	240 lm
Luminous flux emergency	240 lm
EOF	1
Customs tariff number	94056180
GTIN	4262483023624

TECHNICAL DRAWING

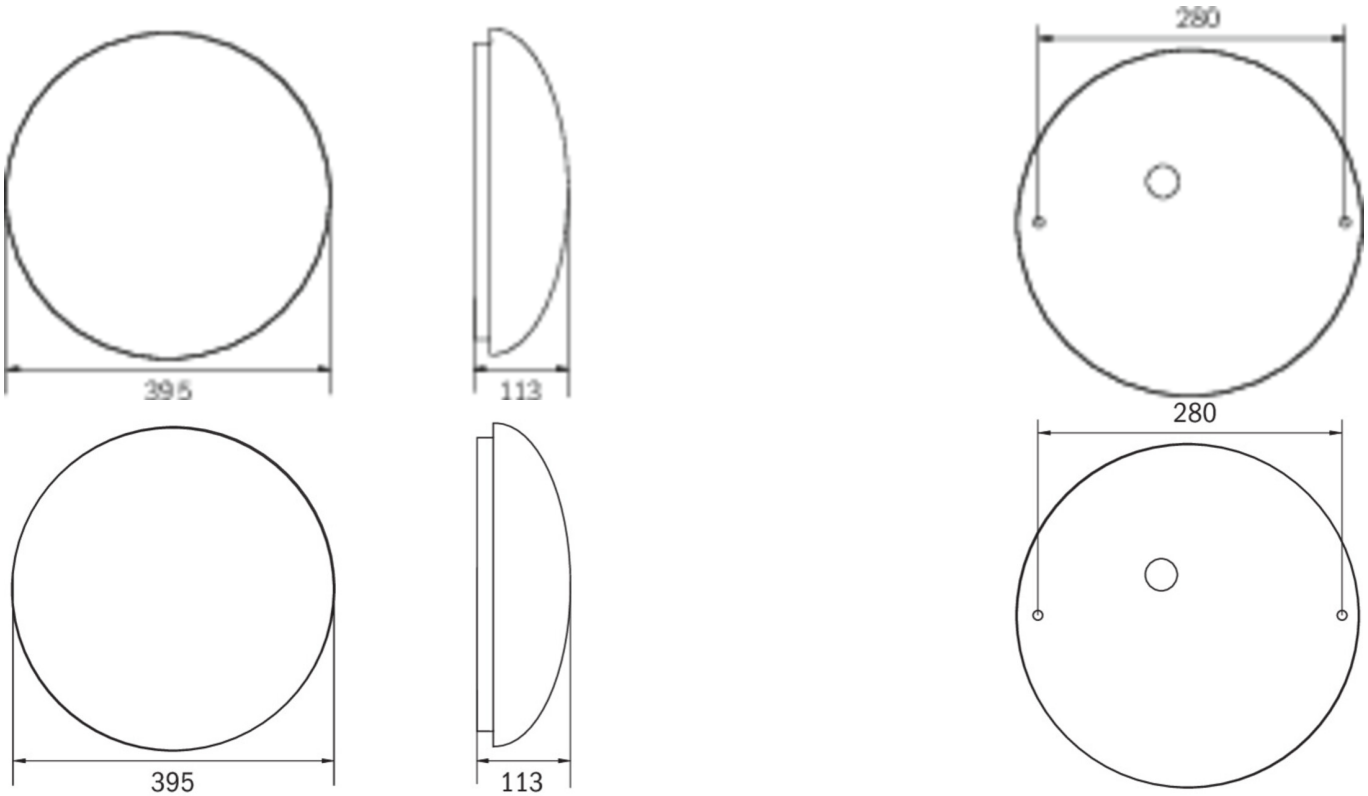

As of: 15.11.2026 - Subject to technical changes and errors.