RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: QBW529CC
General light, Emergency light Centralised power supply systems
Universal, CoreCompact 24 (CC), CPS, IP44, Polycarbonate, White



Round plastic LED general-purpose luminaire, as combined safety luminaire in a timeless design.

Alongside the general-purpose lighting, it also includes an integrated safety light function. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example.

Control and monitoring via central 24 V low-power system.

CE

More information
www.rp-group.com/en/item/QBW529CC

TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP44
Impact resistance (IK)	6
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	19 W
Power maintained	17 W



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING


Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	98 mm
Diameter	339 mm
Weight	1.47
Weight incl. packaging	1.69
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	1800 lm
Luminous flux emergency	470 lm
EOF	0.26
Customs tariff number	94056180
GTIN	4262483023631


RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING

RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

QBW

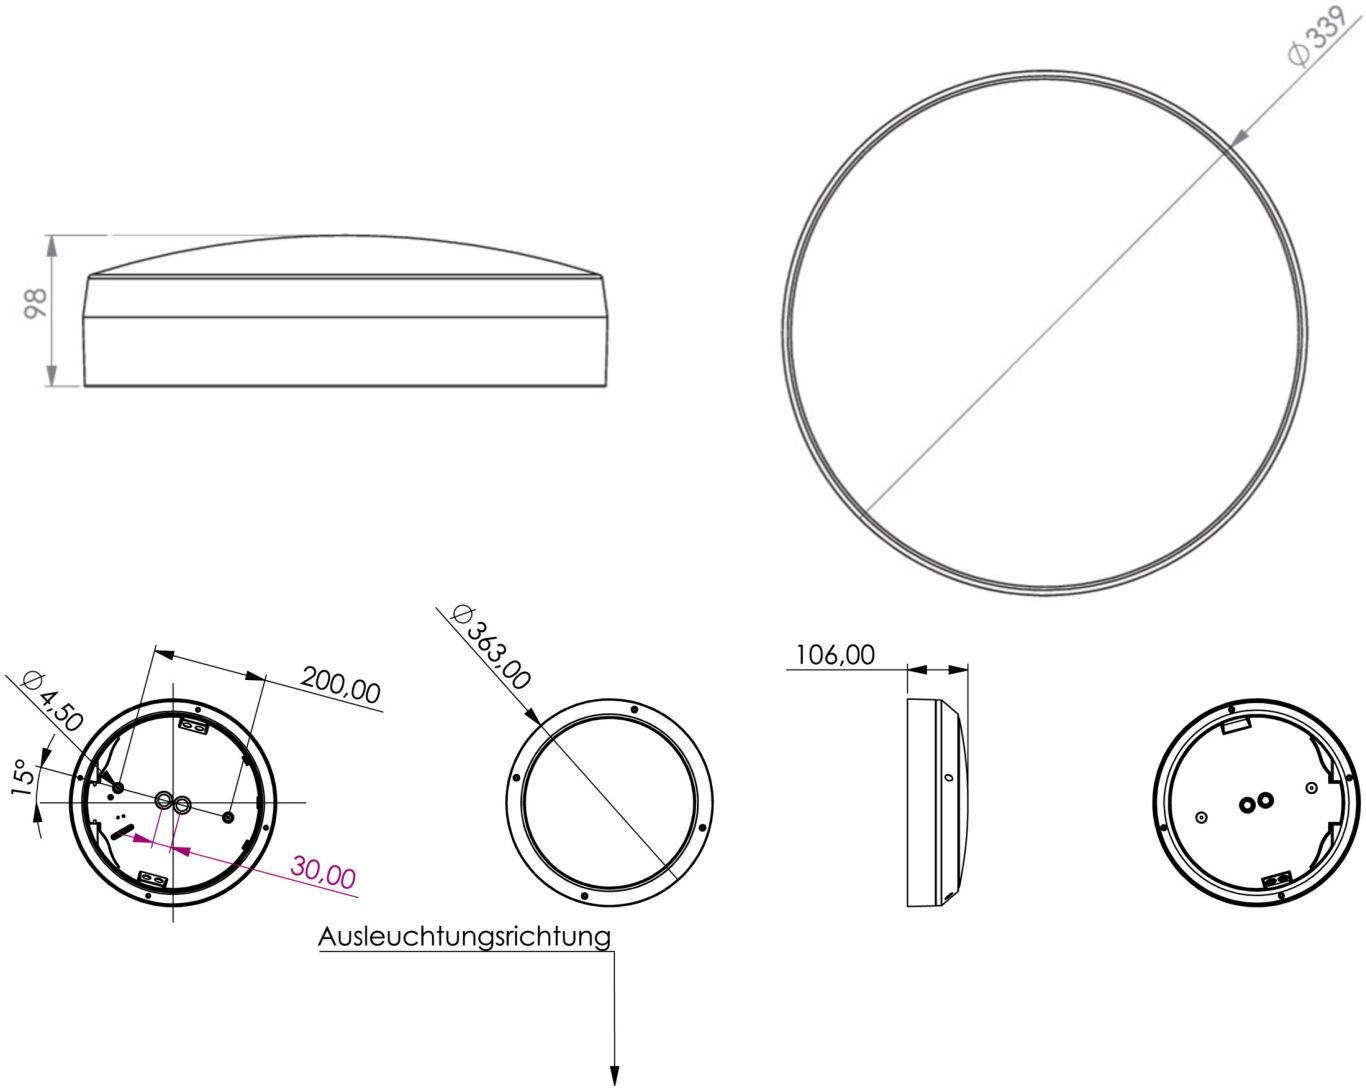

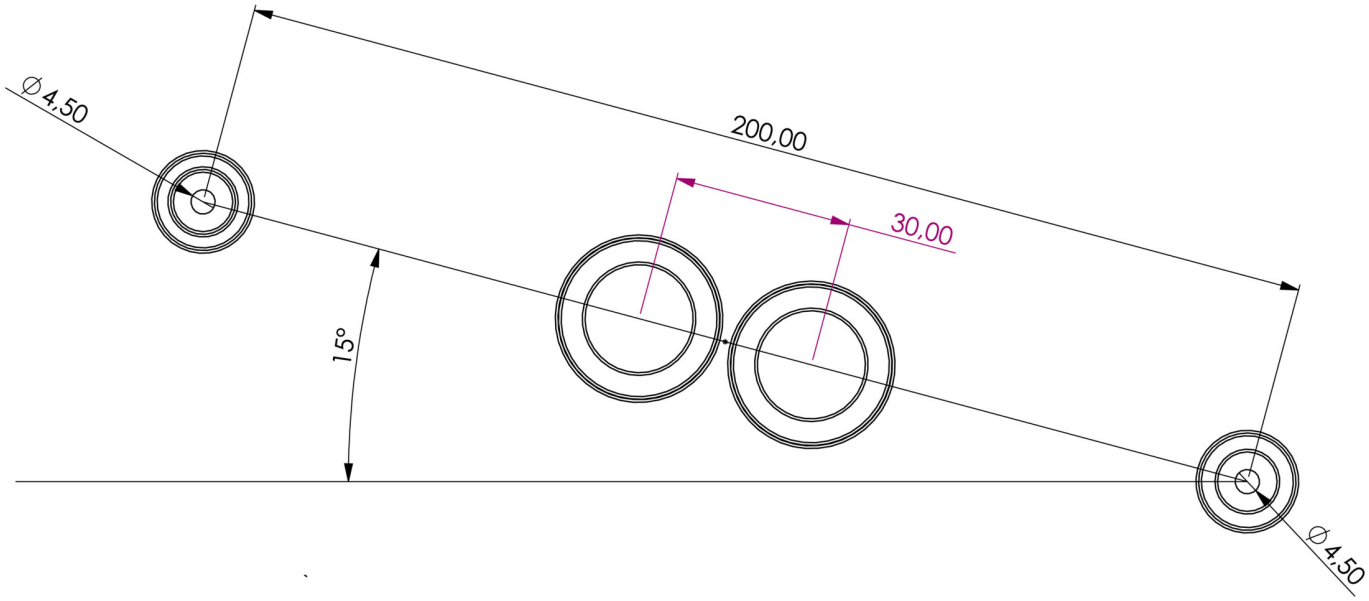

As of: 04.11.2026 - Subject to technical changes and errors.