## Art.-Nr: QCW529CC-AZ
## General light, Emergency light Centralised power supply systems
## Universal, CoreCompact 24 (CC), CPS, IP54, Zinc die-cast, Anthracite



Round zinc die-cast LED luminaire, as combined safety luminaire in a timeless design.

Alongside the general-purpose lighting, it also includes an integrated safety light function. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example.

Control and monitoring via central 24 V low-power system.

More information
www.rp-group.com/en/item/QCW529CC-AZ


## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | General light, Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | 10 |
| Certification | Waste disposal, CE, D-sign |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 (CC) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 24 V |
| Power max. | 19 W |
| Power maintained | 17 W |


| | |
|---|---|
| Power non-maintained | 0,4 W |
| Ambient temperature maintained mode | -20 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Height | 106 mm |
| Diameter | 363 mm |
| Weight | 2.57 |
| Weight incl. packaging | 2.9 |
| Connection cross-section | 2.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 1600 lm |
| Luminous flux emergency | 470 lm |
| EOF | 0.29 |
| Customs tariff number | 94056180 |
| GTIN | 4262483023655 |

## TECHNICAL DRAWING

QCW

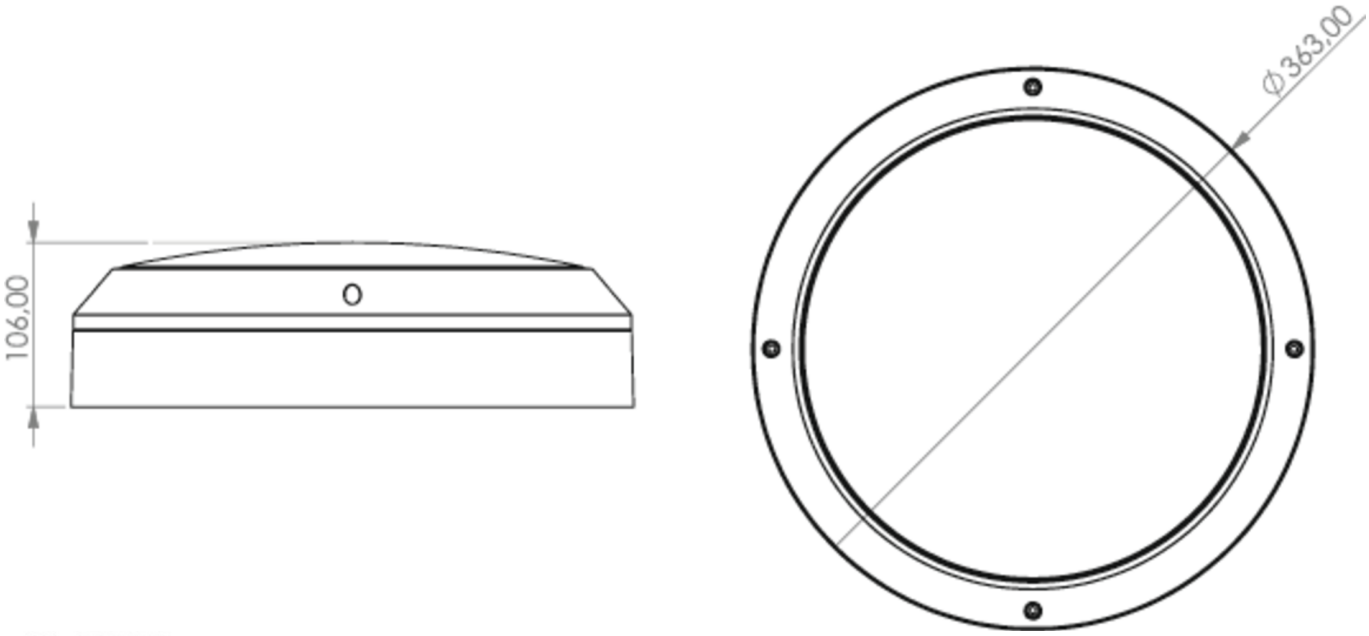


QCW

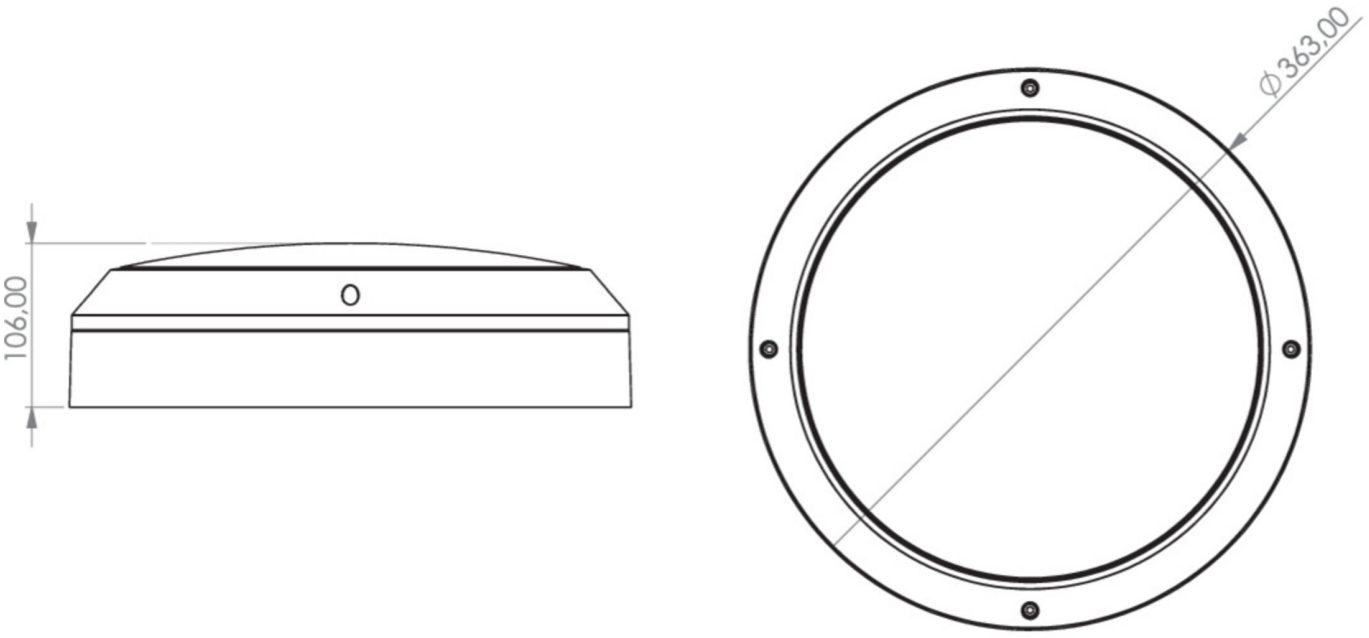


As of: 22.11.2026 - Subject to technical changes and errors.