



**Art.-Nr: EERL438SC**  
**Emergency light Self-contained**  
**Ceiling mounting, 8 h, IP20, Zinc die-cast, White, Flexiklick**  
**round & corridor**

High-grade zinc-aluminium safety luminaire for fitting in the ceiling.

The compact design permits mounting in a 68mm opening in the ceiling. Alongside the usual recessed ceiling mounting, it can also be mounted in conventional and fire protection sockets. It is secured with ease using tension springs or a screw connection on the box.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and corridor lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

[www.rp-group.com/en/item/EERL438SC](http://www.rp-group.com/en/item/EERL438SC)



## TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Ceiling mounting
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained



Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power max.	2,6 W
Power maintained	1,7 W
Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	4 mm
Diameter	88 mm
Installation dimensions Diameter	68 mm
Weight	0.33
Weight incl. packaging	0.46
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	75 lm
Luminous flux emergency	75 lm
Customs tariff number	94056180
GTIN	4262483024096




**TECHNICAL DRAWING**


**Maße EER / EEQ**



**Lochausschnitt EER / EEQ**





Einsatz in U-Putzdose: 68mm  
Einzelbatterie mit UH-1: 74mm

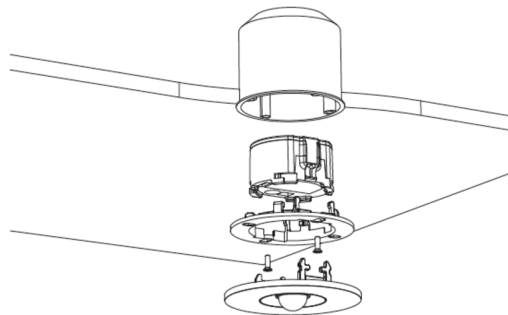

Schalterdose notwendig (nicht im Lieferumfang enthalten)

**Einzelbatterie-Elektronik-Box (UH-1)**

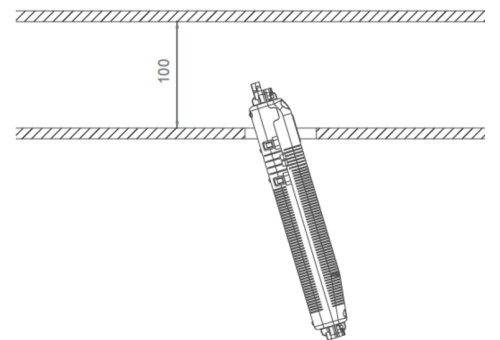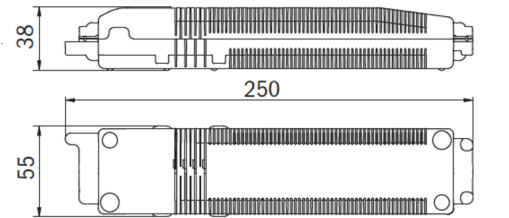

As of: 10.07.2026 - Subject to technical changes and errors.