RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: KSU413WL
# Exit sign Self-contained Universal, Wireless Professional (WL), 3 h, 22 m, IP54, Polycarbonate, White, Set of pictograms, Universal mounting



Innovative plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE 5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/KSU413WL

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 3 h |

| | |
|---|---|
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power maintained | 3,9 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 34 mm |
| Width | 250 mm |
| Height | 174 mm |
| Weight | 0.67 |
| Weight incl. packaging | 0.75 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056120 |
| GTIN | 4262483024324 |

## TECHNICAL DRAWING

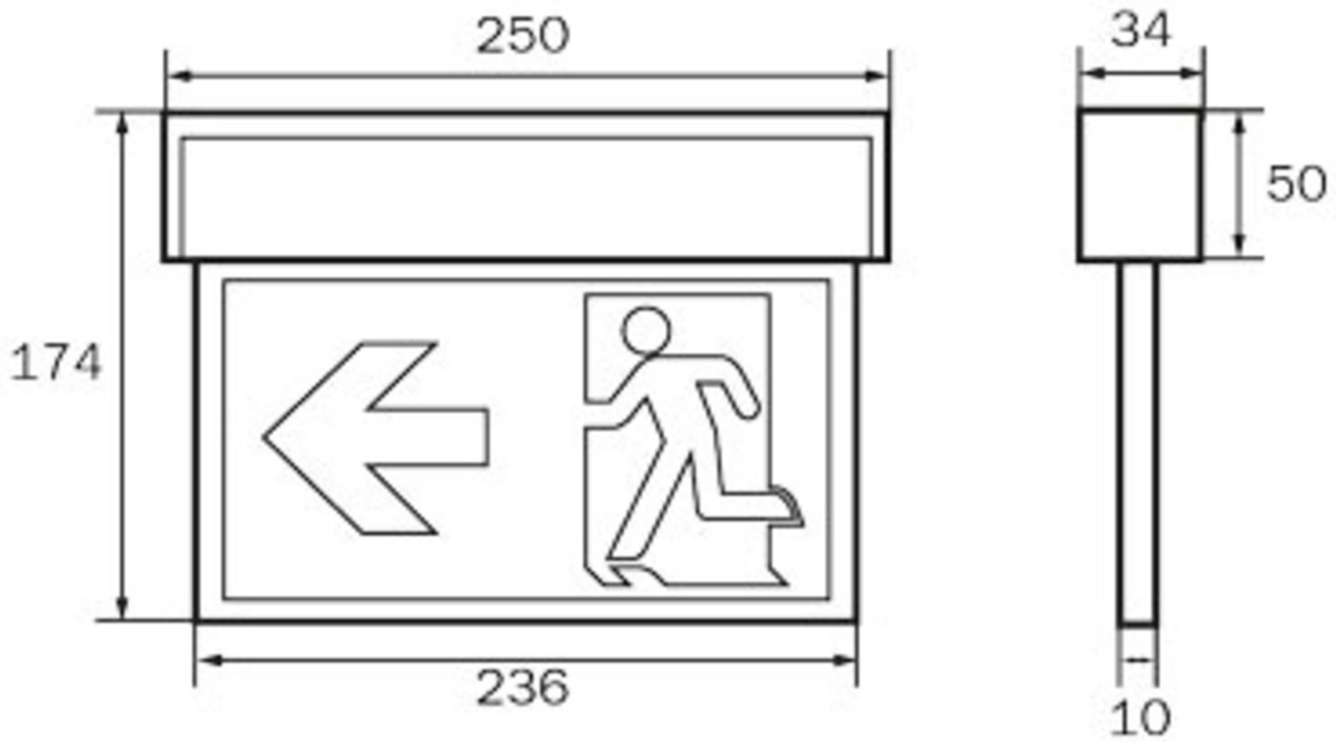


## ACCESSORY LIST

KME-EB - Mounting frame

AWKSU - Wall bracket

2PW-EB - Pendant

KMBE - Concrete-mounted box

BALLPLX-KMU.01 - Ball impact-resistant protective cover (PMMA) transparent for lights - KMU, KSU und ASMU

DSA - Wire suspension

KSE-MB-WS - Mounting frame

KSE-MB-SI - Mounting frame

As of: 18.11.2026 - Subject to technical changes and errors.