
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## Art.-Nr: YMOCA-SAL-2016
## Salvador 2016
## Capable of managing up to 16 DALI driver addresses with integrated DALI bus power supply.

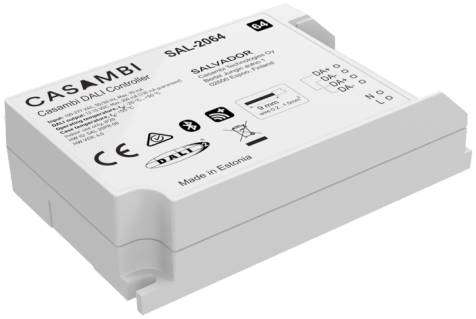


The Salvador Series 2000 seamlessly integrates wired DALI drivers into the Casambi system. When integrated, DALI luminaires appear as luminaires in the Casambi network. Notably, this product supports industry standards such as DALI D4i, DALI DT6, and DALI DT8.

The Salvador Series 2000 is only for connecting to DALI drivers. No DALI controls must be connected to Salvador Series 2000 products.

The Salvador Series 2000 has integrated 130 mA bus power supply for the DALI operation.

More information
www.rp-group.com/en/item/YMOCA-SAL-2016

## TECHNICAL DATA

| | |
|---|---|
| **Dimensions** | |
| Product dimensions Length | 127 mm |
| Product dimensions Width | 67 mm |
| Product dimensions Height | 28 mm |
| Product weight | 120 g |
| **Color** | |
| Color | White |
| **Housing material** | |
| Housing material | Polycarbonate |
| **Storage temperature range** | |
| Storage temperature range (Min) | -25 °C |
| Storage temperature range (Max) | +75 °C |
| **Housing temperature tc (Max)** | |
| Housing temperature tc (Max) | +55 °C |
| **Temperatures** | |
| Ambient temperature (Min) | -20 °C |
| Ambient temperature (Max) | +50 °C |
| **CASAMBI Products** | |

| | |
|---|---|
| Input vokltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| External power supply unit | No |
| Communication type | CASAMBI, Bluetooth, DALI 1, DALI 2 |
| Frequency band | 2,403 - 2,479 GHz |
| Max. transmission power | +8 dBm |
| BMS | DALI |
| DALI bus supply | Yes |
| DALI bus voltage | 12 - 15 VDC |
| DALI output current | 130 mA |
| Number of DALI addresses | 16 pcs. |
| CASAMBI Repeater | Yes |
| Certifications | CE |
| **CASAMBI Connection** | |
| Mounting | Universal |
| Connection cross-section | 1,5 mm² |