
Art.-Nr: PXD019ML
Exit sign Centralised power supply systems Surface mounting, Central power supply (ML), CPS, 30 m, IP65, PCABS, Polycarbonate, White, Set of pictograms

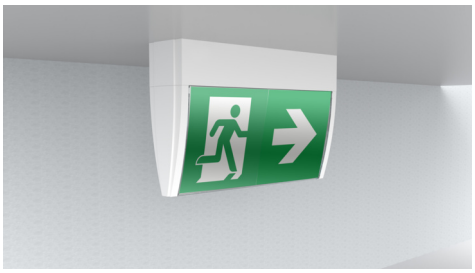

Design and function-optimized convex exit sign with a clear, closed cover that tapers symmetrically towards the bottom. The screwed cover ensures stability and a high IP protection class, while the functional technology remains unobtrusive and no screws are visible from the outside. The pictograms are on the inside and are inserted solvent-free for one- or two-sided labeling.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.

More information
www.rp-group.com/en/item/PXD019ML

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V

Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power maintained	5,2 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	73 mm
Width	339 mm
Height	211 mm
Weight	1.37
Weight incl. packaging	1.47
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4262483025819

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 14.11.2026 - Subject to technical changes and errors.