
Art.-Nr: PXD519CC
Exit sign Centralised power supply systems Surface mounting, CoreCompact 24 (CC), CPS, 30 m, IP65, PCABS, Polycarbonate, White, Set of pictograms

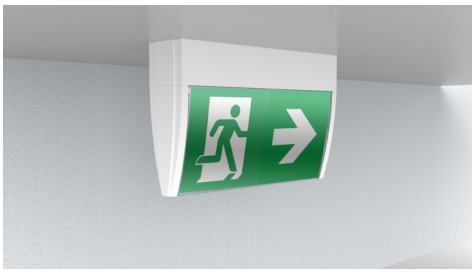

Design and function-optimized convex exit sign with a clear, closed cover that tapers symmetrically towards the bottom. The screwed cover ensures stability and a high IP protection class, while the functional technology remains unobtrusive and no screws are visible from the outside. The pictograms are on the inside and are inserted solvent-free for one- or two-sided labeling.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.

More information
www.rp-group.com/en/item/PXD519CC

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V

Power max.	4,2 W
Power maintained	4,2 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 50 °C
Depth	73 mm
Width	339 mm
Height	211 mm
Weight	1.37
Weight incl. packaging	1.47
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4262483025840

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 14.11.2026 - Subject to technical changes and errors.