
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXD413WL
Exit sign
Surface mounting, Wireless Professional (WL), 30 m, IP65, PCABS, Polycarbonate, White, Set of pictograms

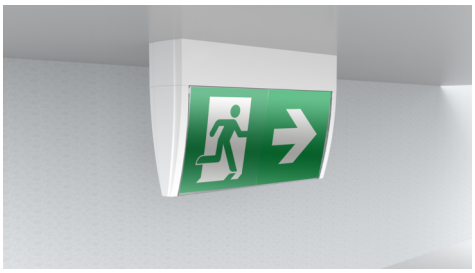

Design and function-optimized convex exit sign with a clear, closed cover that tapers symmetrically towards the bottom. The screwed cover ensures stability and a high IP protection class, while the functional technology remains unobtrusive and no screws are visible from the outside. The pictograms are on the inside and are inserted solvent-free for one- or two-sided labeling.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.

More information
www.rp-group.com/en/item/PXD413WL

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Monitoring	Wireless Professional (WL)
Battery	/
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	73 mm
Width	339 mm
Height	211 mm

Weight	1.3
Weight incl. packaging	1.4
Customs tariff number	94056120
GTIN	4262483025864

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

LFP3233-SET-2AKKU - Battery