



**Art.-Nr: PXDL029ML**

**Emergency light Centralised power supply systems  
Surface mounting, CPS, IP65, PCABS, Polycarbonate, White,  
Flexiklick**

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Control and monitoring via central power supply system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information  
[www.rp-group.com/en/item/PXDL029ML](http://www.rp-group.com/en/item/PXDL029ML)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Emergency light                  |
| Mounting               | Surface mounting                 |
| Pictograph             | No                               |
| Illuminant             | LED                              |
| Housing material       | PCABS, Polycarbonate             |
| Housing color          | White                            |
| Protection type (IP)   | IP65                             |
| Impact resistance (IK) | 8                                |
| Certification          | WEEE, CE, D-Sign                 |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltage AC       | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |
| Input voltage DC       | 216 V                            |
| Power max.             | 5,2 W                            |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power maintained                        | 5,2 W               |
| Power non-maintained                    | 1,1 W               |
| Ambient temperature maintained mode     | -20 °C to 50 °C     |
| Ambient temperature non-maintained mode | -20 °C to 50 °C     |
| Depth                                   | 73 mm               |
| Width                                   | 339 mm              |
| Height                                  | 71 mm               |
| Weight                                  | 0.7                 |
| Weight incl. packaging                  | 0.8                 |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 520 lm              |
| Luminous flux emergency                 | 520 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4262483026571       |



## TECHNICAL DRAWING

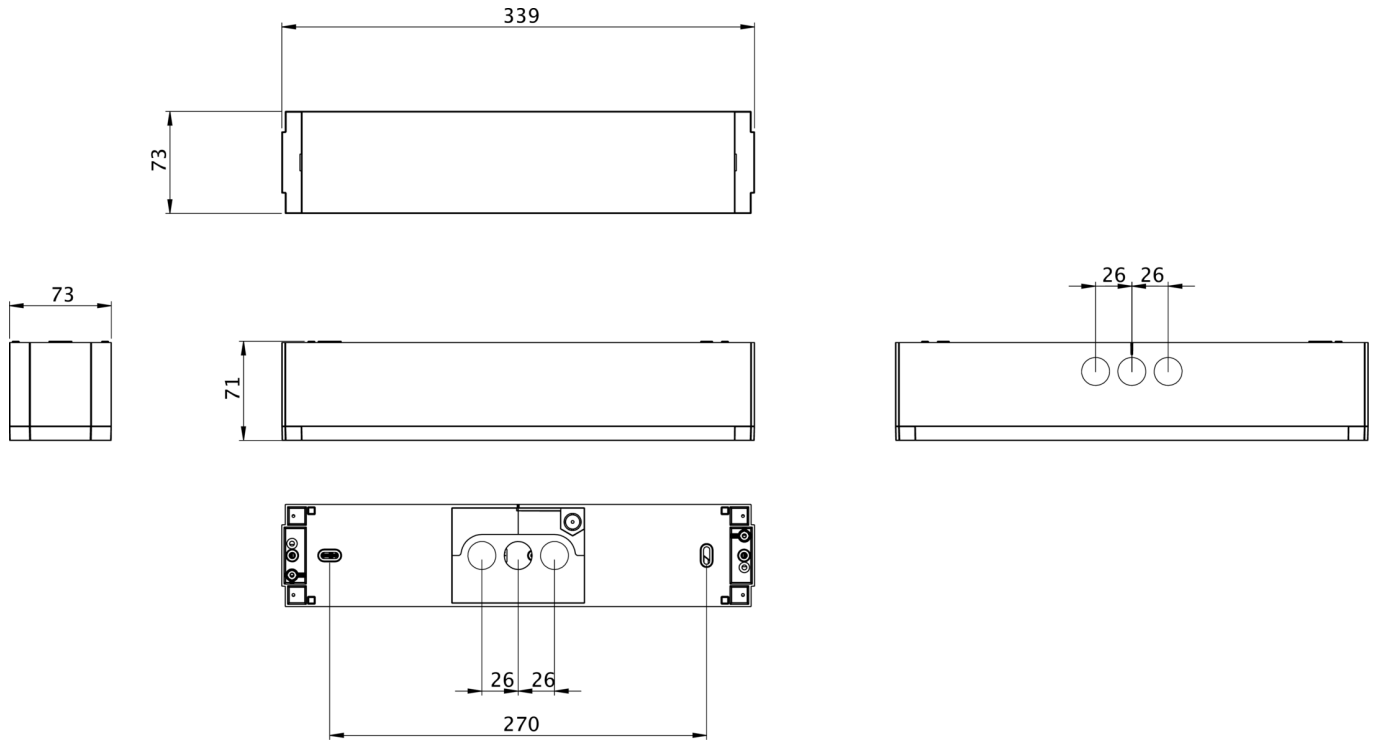

## ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 24.08.2026 - Subject to technical changes and errors.