



## Art.-Nr: YFLSO-LANS-1001-WS

LED spotlight, SOLID series. Die-cast aluminium housing, suitable for outdoor use, colour: black, powder-coated. Cover made of tempered glass. Robust housing with IP 66 and high impact resistance IK08. Powerful LED technology with over 140lm/W for effective illumination of large areas. Switchable control gear, built-in. Extremely flexible use thanks to flat design and adjustable angle of inclination. Connection via open cable end.



More information

[www.rp-group.com/en/item/YFLSO-LANS-1001-WS](http://www.rp-group.com/en/item/YFLSO-LANS-1001-WS)



### TECHNICAL DATA


| Dimensions                  |                      |
|-----------------------------|----------------------|
| Product dimensions Length   | 175 mm               |
| Product dimensions Width    | 165 mm               |
| Product dimensions Height   | 34 mm                |
| Product weight              | 700 kg               |
| Color                       |                      |
| Color                       | White                |
| Housing material            |                      |
| Housing material            | Aluminum die-cast    |
| Certification               |                      |
| Certification               | CE, RoHS             |
| Insulation class            | 1                    |
| Protection type (IP)        | IP66                 |
| Shock resistance level (IK) | 8                    |
| Electrical connection       |                      |
| Rated power                 | 10 W                 |
| Input voltage AC            | 220-240V / 50-60Hz V |





|                           |                            |
|---------------------------|----------------------------|
| Power factor              | 0,9 PF                     |
| power supply              |                            |
| DC suitability            | Yes                        |
| Electrical design         | with internal control gear |
| Light data                |                            |
| Light source              | LED                        |
| Rated luminous flux       | 1400 lm                    |
| Colour rendering index    | > 70 Ra                    |
| Beam angle                | 97 °                       |
| Color temperature         | 4000 K                     |
| Light color               | 740                        |
| Service life              | 120000 h, L70              |
| Light yield               | 140 lm/w                   |
| Temperatures              |                            |
| Ambient temperature (Min) | -30 °C                     |
| Ambient temperature (Max) | 50 °C                      |
| CASAMBI Products          |                            |
| Input voltage DC          | 216 V                      |
| Mounting                  |                            |
| Mounting                  | Universal                  |



TEXT.LICHTVERTEILUNG

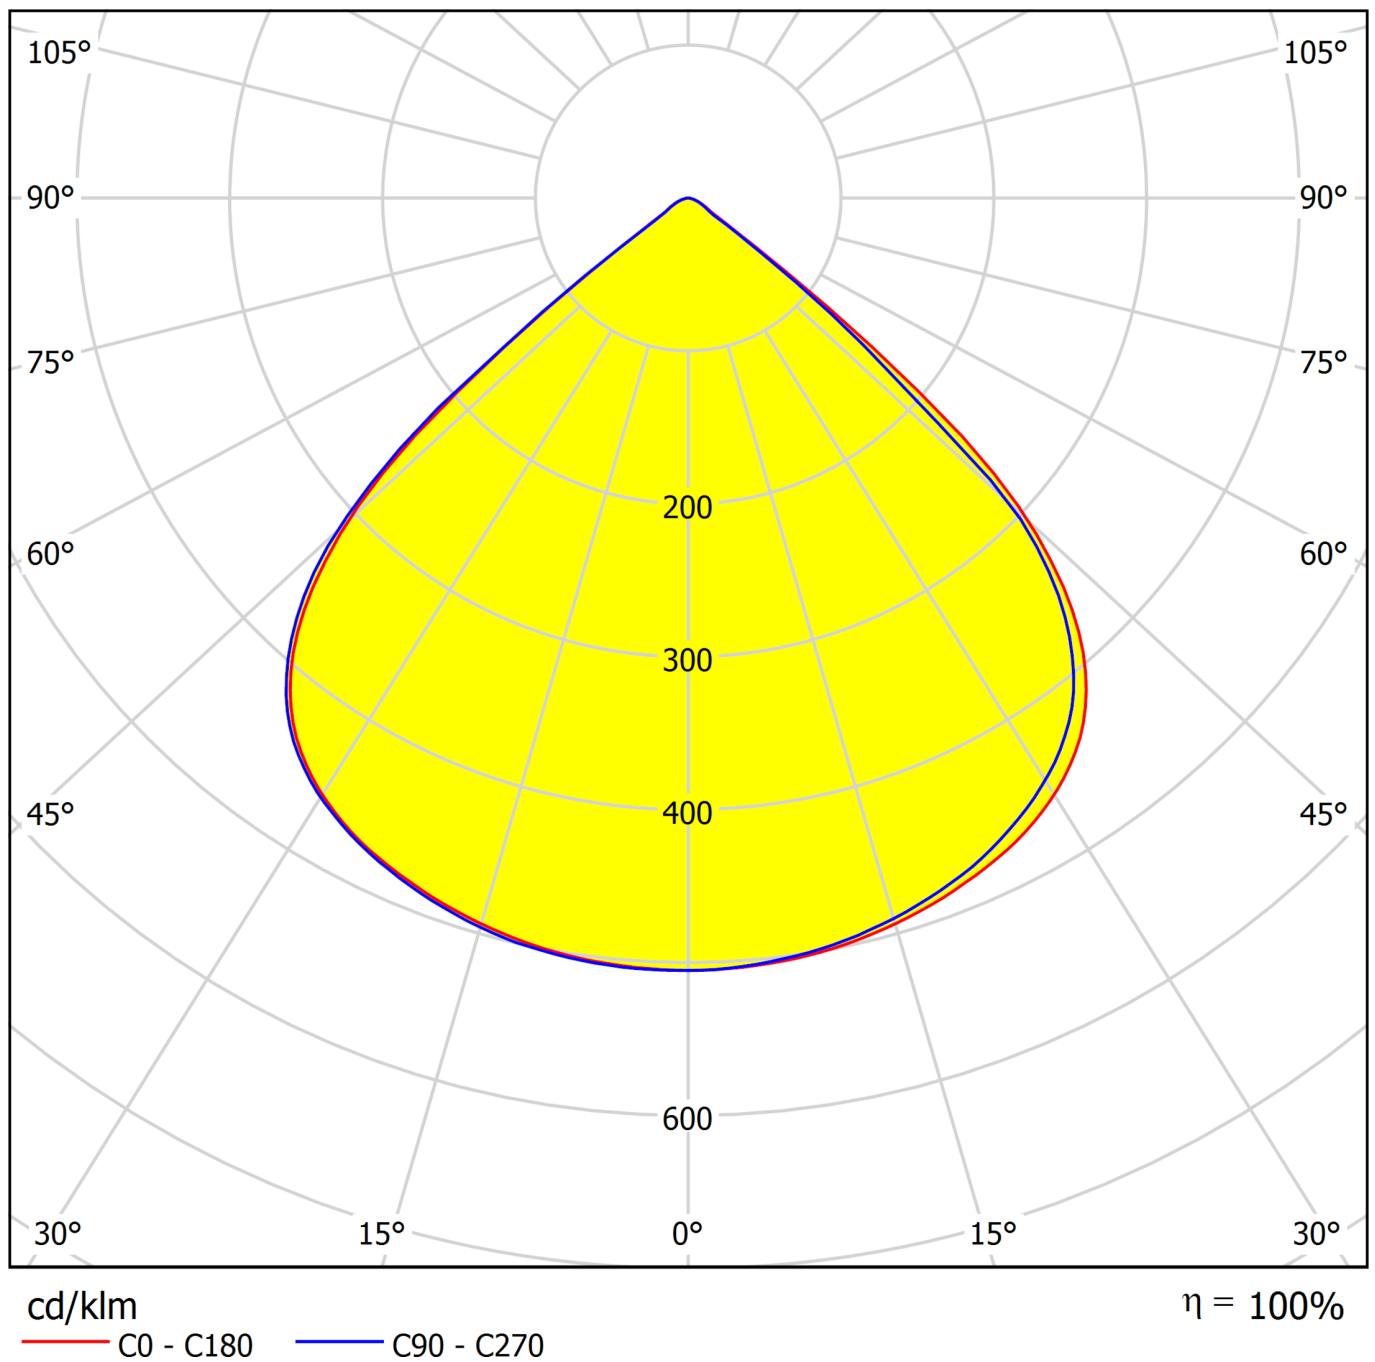

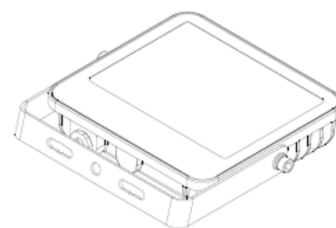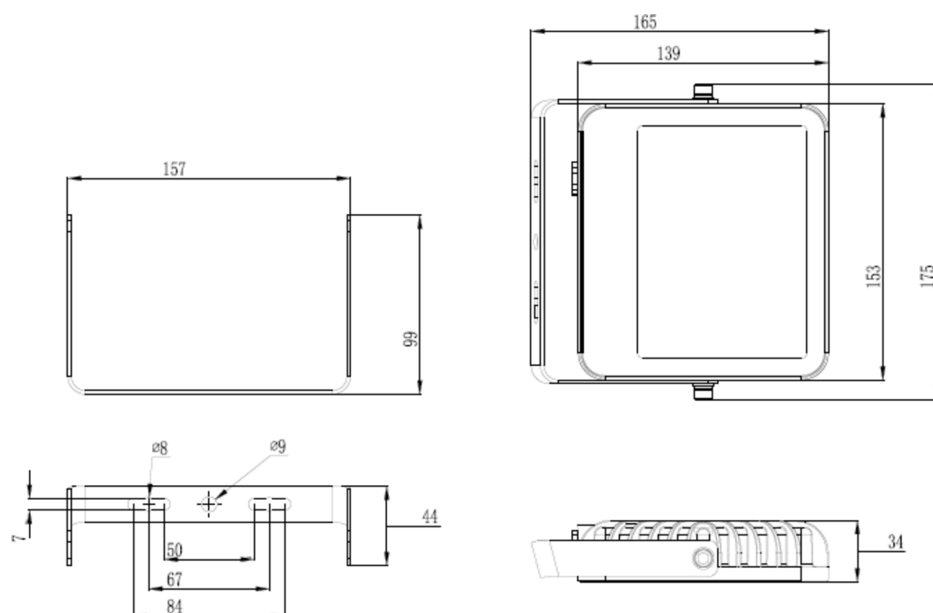

YFLSO-LANS-1001