Art.-Nr: ZPMR029
Emergency light, General light Centralised power supply systems soil structure, Without monitoring, CPS, IP65, Zinc die-cast, Anthracite



The bollard light has a smooth cylindrical body with no protruding parts. It is made of die-cast aluminum with an anthracite surface. The light outlet is made of robust, transparent polycarbonate and enables even light distribution around the lamp.

The luminaire is particularly suitable for illuminating outside areas, as well as escape and rescue routes outside the building to a safe area.

The color temperature is set to 3200K and can be changed to 2700K or 4000K on the lamp.

Optionally, the luminaire can be supplied with an emergency lighting supply unit type NVGS in the event of a power failure and thus be integrated into a wireless professional installation, for example, with radio monitoring.

CE


More information
www.rp-group.com/en/item/ZPMR029

TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	soil structure
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP65
Impact resistance (IK)	10
Certification	CE, Waste disposal
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V

Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	10 W
Power maintained	10 W
Ambient temperature maintained mode	-20 °C to 50 °C
Ambient temperature non-maintained mode	-20 °C to 50 °C
Height	800 mm
Diameter	160 mm
Weight	5.6
Weight incl. packaging	6.2
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	610 lm
Luminous flux emergency	610 lm
EOF	1
Customs tariff number	94056180
GTIN	4262483027066

TECHNICAL DRAWING

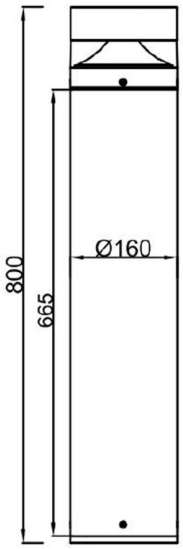

As of: 15.11.2026 - Subject to technical changes and errors.