## Art.-Nr: KEU411WL
## Emergency light Self-contained Universal, Wireless Professional (WL), 1 h, IP40, Polycarbonate, White, Flexiklick



Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with **Wireless Professional**. The luminaire is fitted with the innovative **flexible plug-in system** for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

CE


More information
www.rp-group.com/en/item/KEU411WL

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 Hz |

| | |
|---|---|
| Power max. | 5,3 W |
| Power maintained | 4,3 W |
| Power non-maintained | 0,7 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 332 mm |
| Width | 48 mm |
| Height | 72 mm |
| Weight | 0.41 |
| Weight incl. packaging | 0.45 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 305 lm |
| Luminous flux emergency | 335 lm |
| Customs tariff number | 94056120 |
| GTIN | 4262483029121 |

## TECHNICAL DRAWING

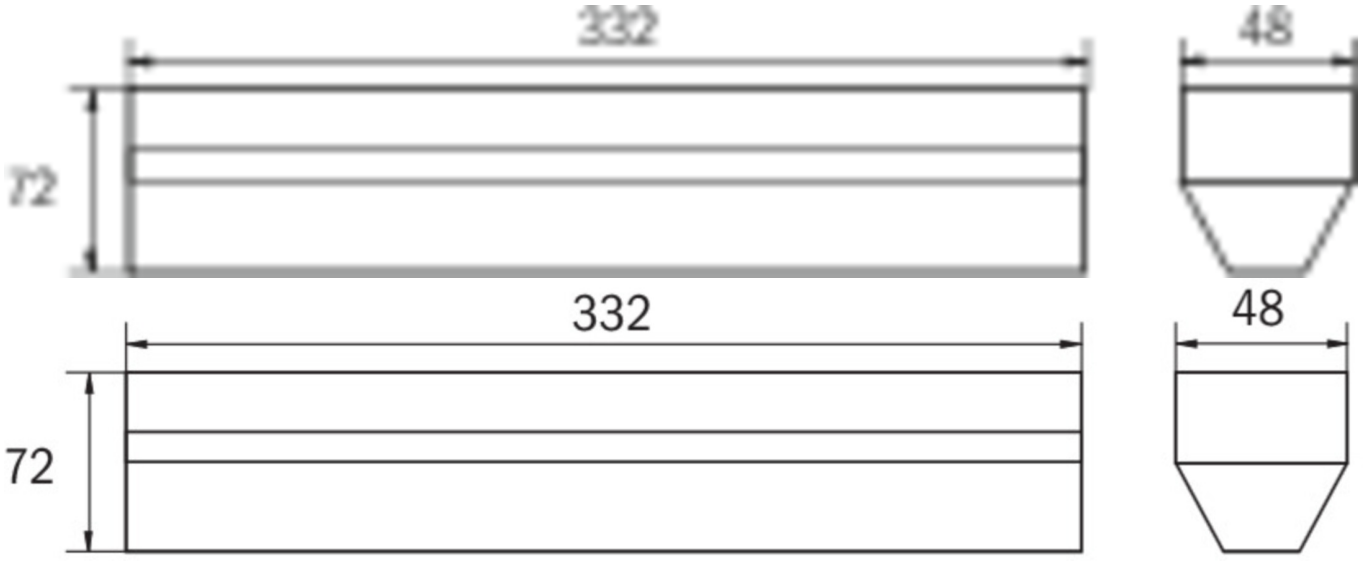

## ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting