
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: PXD411SC-TT
# Exit sign Self-contained
# Surface mounting, SelfControl (SC), 1 h, 30 m, IP65, PCABS, Polycarbonate, White, Set of pictograms, low-temperature batteries

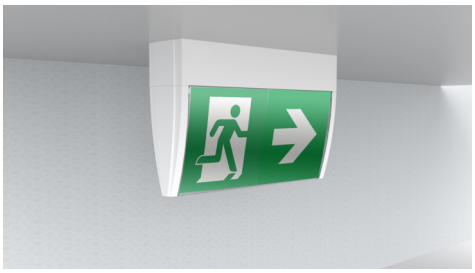

Design and function-optimized convex exit sign with a clear, closed cover that tapers symmetrically towards the bottom. The screwed cover ensures stability and a high IP protection class, while the functional technology remains unobtrusive and no screws are visible from the outside. The pictograms are on the inside and are inserted solvent-free for one- or two-sided labeling.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard. The designation "TT" stands for low-temperature batteries. These special lithium iron phosphate batteries are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.

More information
www.rp-group.com/en/item/PXD411SC-TT

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | PCABS, Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | CE, Waste disposal, D-sign, HACCP (food law conformity) |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/3,3 Ah |

| | |
|---|---|
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 180 V - 250 V |
| Input frequency | 50 Hz |
| Power max. | 6,9 W |
| Power maintained | 5,7 W |
| Power non-maintained | 2 W |
| Ambient temperature maintained mode | -15 °C to 40 °C |
| Ambient temperature non-maintained mode | -15 °C to 40 °C |
| Depth | 73 mm |
| Width | 339 mm |
| Height | 211 mm |
| Weight | 1.46 |
| Weight incl. packaging | 1.56 |
| Connection cross-section | 2,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 320 lm |
| Luminous flux emergency | 320 lm |
| Customs tariff number | 94056120 |
| GTIN | 4262483029145 |

## ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 13.11.2026 - Subject to technical changes and errors.