Art.-Nr: KMB519CC-SW
Emergency light Centralised power supply systems Universal, CoreCompact 24 (CC), CPS, IP54, Polycarbonate, Black, Universal mounting



Compact safety luminaire for universal mounting. The narrow rectangular plastic housing is discreetly reduced to the essentials. Illumination of the escape and emergency routes is assisted by the optics integrated in the surround.

Control and monitoring via central 24 V low-power system. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE


More information
www.rp-group.com/en/item/KMB519CC-SW

TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Black
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	2,1 W
Power maintained	2,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-10 °C to 40 °C

Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	250 mm
Width	34 mm
Height	50 mm
Weight	0.44
Weight incl. packaging	0.51
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
GTIN	4262483029985

TECHNICAL DRAWING

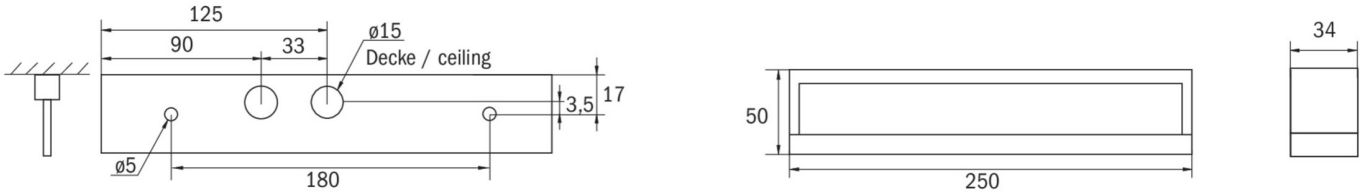

ACCESSORY LIST

KME-EB - Mounting frame

BALL1 - Wire mesh guard

KMBE - Concrete-mounted box

BALLPLX-KMB - Ball impact-resistant protective cover (PMMA) transparent for lights - KMB

KMBFH - Customisable positioning for optimal emergency exit lighting – 249 x 40 mm

As of: 13.11.2026 - Subject to technical changes and errors.