RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: LFU12009-CCT-BM
Emergency light, General light Centralised power supply systems
Wall mounting, Surface mounting, Without monitoring, CPS, IP66, Polycarbonate, Light grey



LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

The integrated motion detector **(BM)** reliably detects movements and automatically turns on the light in mains operation.

CE


More information
www.rp-group.com/en/item/LFU12009-CCT-BM

TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, Waste disposal
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	230 V

Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	36 W
Power maintained	36 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	5040 lm
Luminous flux emergency	5040 lm
EOF	1
Customs tariff number	94054231
GTIN	4262483029688

TECHNICAL DRAWING

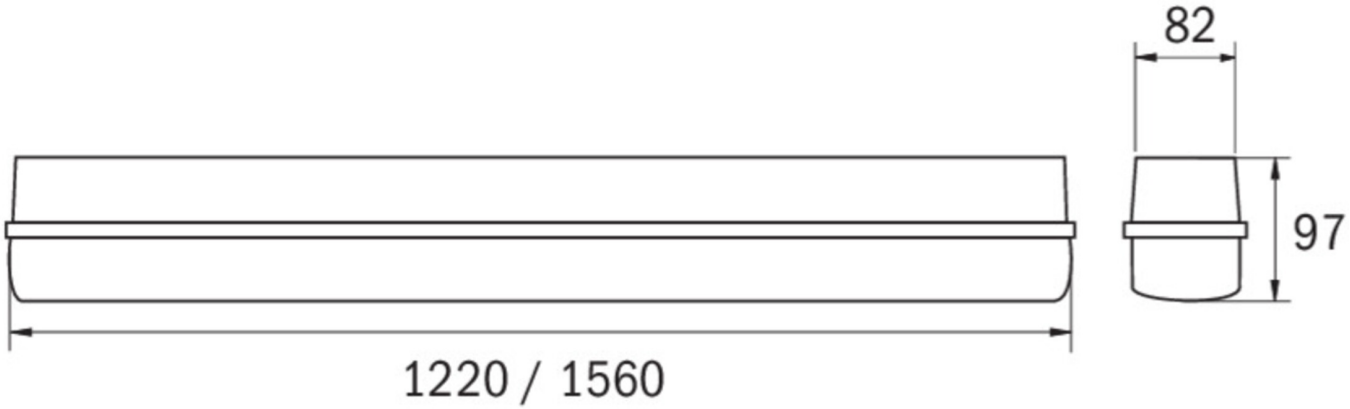

As of: 08.11.2026 - Subject to technical changes and errors.