




Art.-Nr: LFU12009-CCT-BM
Emergency light, General light Centralised power supply systems
Wall mounting, Surface mounting, Without monitoring, CPS, IP66, Polycarbonate, Light grey

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

The integrated motion detector (**BM**) reliably detects movements and automatically turns on the light in mains operation.

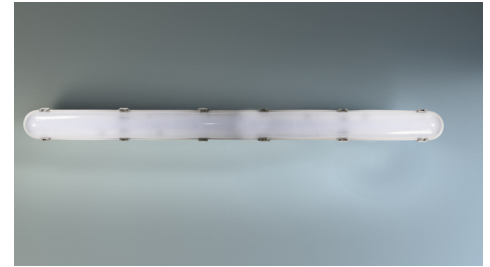

More information

www.rp-group.com/en/item/LFU12009-CCT-BM




TECHNICAL DATA

| | |
|------------------------|----------------------------------|
| Luminaire type | Emergency light, General light |
| Mounting | Wall mounting, Surface mounting |
| Pictograph | No |
| Housing material | Polycarbonate |
| Housing color | Light grey |
| Protection type (IP) | IP66 |
| Impact resistance (IK) | 8 |
| Certification | CE, WEEE |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |



| | |
|---|---------------------|
| Input voltage DC | 216 V |
| Power max. | 36 W |
| Power maintained | 36 W |
| Ambient temperature maintained mode | -20 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 1220 mm |
| Width | 82 mm |
| Height | 97 mm |
| Weight | 1.8 |
| Weight incl. packaging | 2.05 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 5040 lm |
| Luminous flux emergency | 5040 lm |
| EOF | 1 |
| Customs tariff number | 94054231 |
| GTIN | 4262483029688 |

TECHNICAL DRAWING

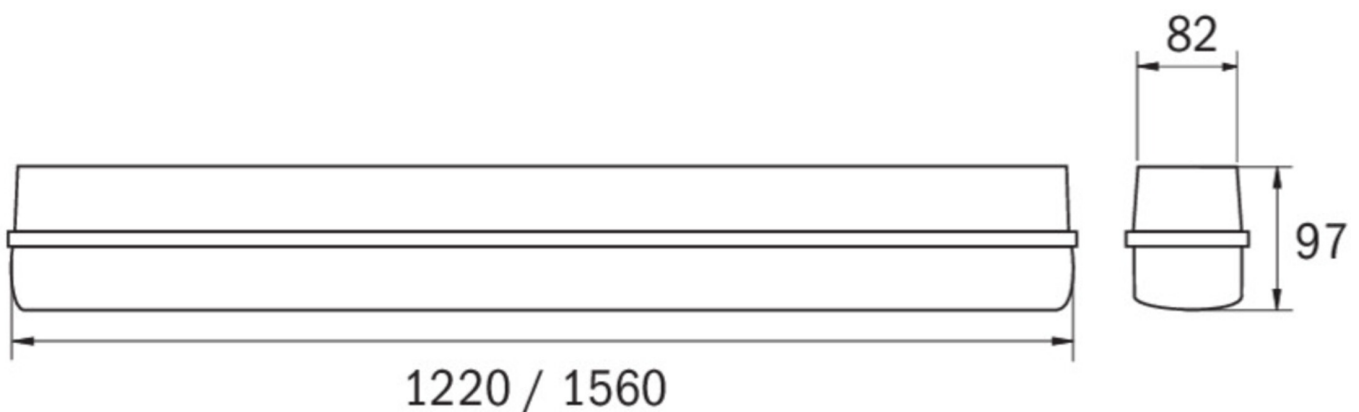

As of: 07.07.2026 - Subject to technical changes and errors.