## Art.-Nr: LFU15403SC-CCT



### Wall mounting, Surface mounting, SelfControl (SC), 3 h, IP66, Polycarbonate, Light grey

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

The wattage (36 - 55W / 4400 - 7700lm) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Automatic monitoring of safety luminaire with SelfControl.


More information
www.rp-group.com/en/item/LFU15403SC-CCT

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light, General light |
| Mounting | Wall mounting, Surface mounting |
| Pictograph | No |
| Housing material | Polycarbonate |
| Housing color | Light grey |
| Protection type (IP) | IP66 |
| Impact resistance (IK) | 8 |
| Certification | CE, Waste disposal |
| Insulation class | 1 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V/ |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 220 V - 240 V |
| Input frequency | 50 / 60 Hz |
| Power max. | 57 W |
| Power maintained | 54 W |
| Power non-maintained | 0,7 W |

| | |
|---|---|
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 1560 mm |
| Width | 82 mm |
| Height | 97 mm |
| Weight | 2.48 |
| Weight incl. packaging | 2.83 |
| Connection cross-section | 1,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 7700 lm |
| Luminous flux emergency | 590 lm |
| EOF | 0.08 |
| Customs tariff number | 94051140 |
| GTIN | 4262483029749 |

## TECHNICAL DRAWING

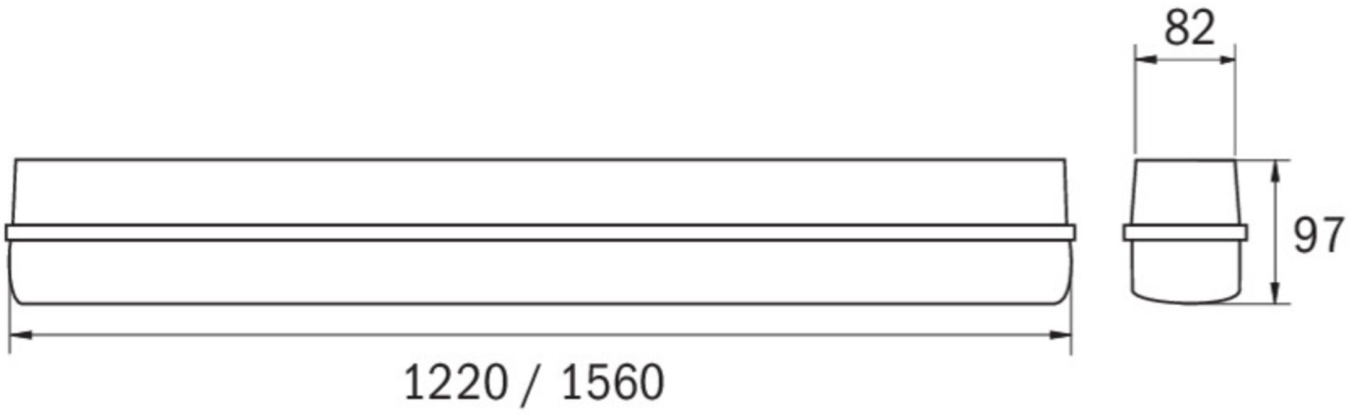


As of: 29.11.2026 - Subject to technical changes and errors.