




**Art.-Nr: LFU15023WL-CCT**

**Wall mounting, Surface mounting, IP66, Polycarbonate, Light grey**

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

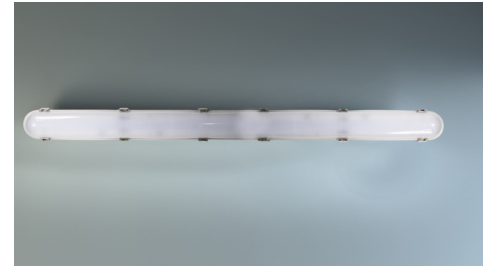

The wattage (36 - 55W / 4400 - 7700lm) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

[www.rp-group.com/en/item/LFU15023WL-CCT](http://www.rp-group.com/en/item/LFU15023WL-CCT)




**TECHNICAL DATA**

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Monitoring	Wireless Professional (WL)
Battery	/
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	1560 mm
Width	82 mm
Height	97 mm
Weight	2.2
Weight incl. packaging	2.55



Customs tariff number	94051140
GTIN	4262483029770

## TECHNICAL DRAWING

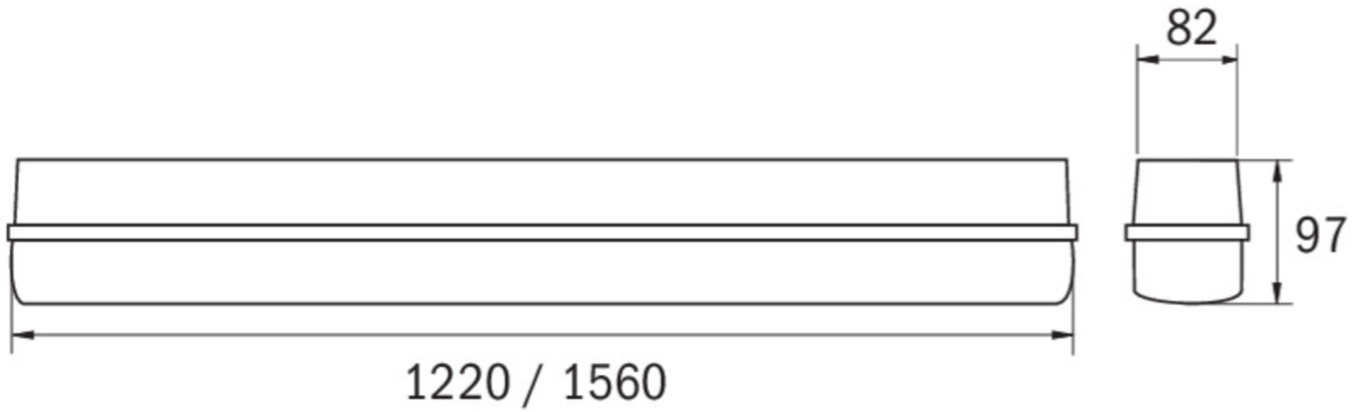

As of: 03.07.2026 - Subject to technical changes and errors.