




**Art.-Nr: LFU12009ML-CCT-D**  
**Emergency light, General light Centralised power supply systems**  
**Wall mounting, Surface mounting, Central power supply (ML), CPS, IP66, Polycarbonate, Light grey**

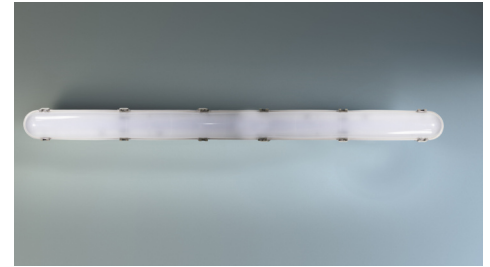

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

The wattage (18-36W) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Control and monitoring via central power supply system.



More information

[www.rp-group.com/en/item/LFU12009ML-CCT-D](http://www.rp-group.com/en/item/LFU12009ML-CCT-D)




## TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	Wall mounting, Surface mounting
Pictograph	No
Housing material	Polycarbonate
Housing color	Light grey
Protection type (IP)	IP66
Impact resistance (IK)	8
Certification	CE, WEEE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz



Input voltage DC	216 V
Power max.	36 W
Power maintained	36 W
Power non-maintained	1,5 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	1220 mm
Width	82 mm
Height	97 mm
Weight	1.8
Weight incl. packaging	2.05
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	5040 lm
Luminous flux emergency	5040 lm
EOF	1
Customs tariff number	94056120
GTIN	4262483029831

## TECHNICAL DRAWING

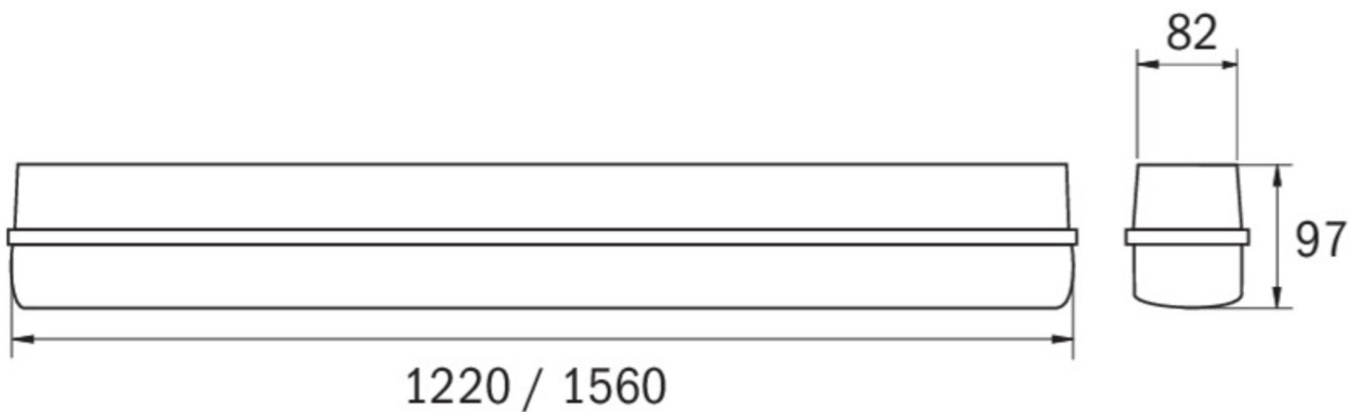

As of: 07.07.2026 - Subject to technical changes and errors.