
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXD413DL-TT
Exit sign
Surface mounting, DALI, 3 h, 30 m, IP65, PCABS, Polycarbonate, White, Set of pictograms

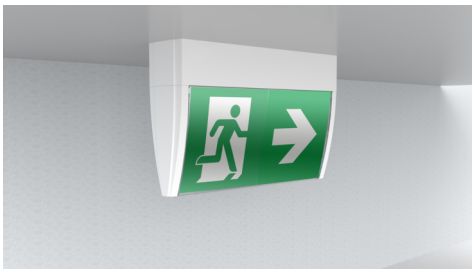

Design and function-optimized convex exit sign with a clear, closed cover that tapers symmetrically towards the bottom. The screwed cover ensures stability and a high IP protection class, while the functional technology remains unobtrusive and no screws are visible from the outside. The pictograms are on the inside and are inserted solvent-free for one- or two-sided labeling.

Central control and monitoring with standardized fieldbus DALI 2 Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.

More information
www.rp-group.com/en/item/PXD413DL-TT

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,2 W
Power maintained	4,7 W
Power non-maintained	1,0 W

Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	73 mm
Width	339 mm
Height	211 mm
Weight	1.39
Weight incl. packaging	1.49
Connection cross-section	2,5 mm²
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4262484980827

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes