



Art.-Nr: PXDL423DL-TT
Emergency light
Surface mounting, 3 h, IP65, PCABS, Polycarbonate, White,
Flexiklick

Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Central control and monitoring with standardized fieldbus DALI 2 The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information
www.rp-group.com/en/item/PXDL423DL-TT




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Surface mounting
Pictograph	No
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	WEEE, CE, D-Sign
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,7 W
Power maintained	5,2 W
Power non-maintained	1,0 W
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	73 mm



Width	339 mm
Height	71 mm
Weight	0.72
Weight incl. packaging	0.82
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484980926

TECHNICAL DRAWING

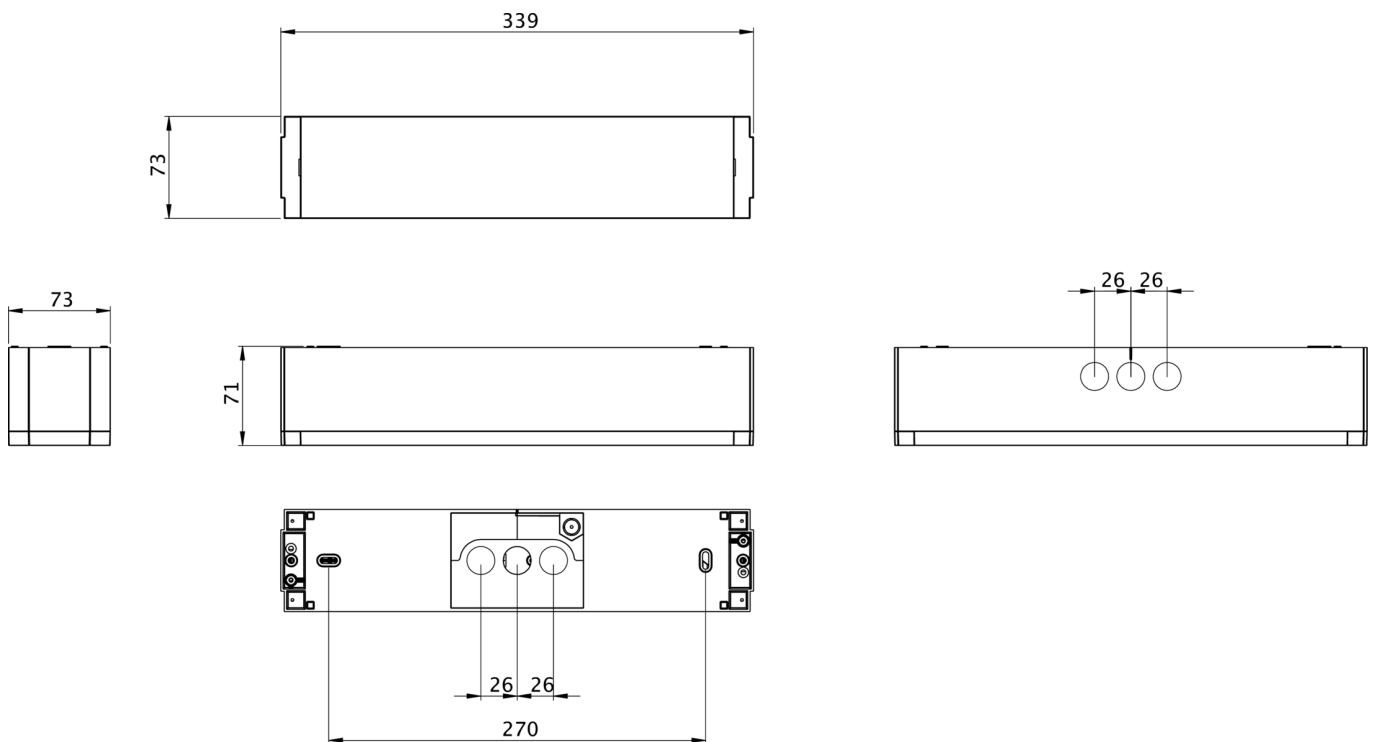

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 11.08.2026 - Subject to technical changes and errors.