RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXDL423DL-TT
Emergency light
Surface mounting, DALI, 3 h, IP65, PCABS, Polycarbonate, White, Flexiklick



Robust plastic emergency light with a high protection rating in a linear design for versatile use.

Suitable for maintained or non maintained mode.

Central control and monitoring with standardized fieldbus DALI 2 The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.


More information
www.rp-group.com/en/item/PXDL423DL-TT

TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Surface mounting
Pictograph	No
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	8
Certification	Waste disposal, CE, D-sign, HACCP (food law conformity)
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,7 W
Power maintained	5,2 W
Power non-maintained	1,0 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	73 mm

Width	339 mm
Height	71 mm
Weight	0.72
Weight incl. packaging	0.82
Connection cross-section	2,5 mm²
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484980926

TECHNICAL DRAWING

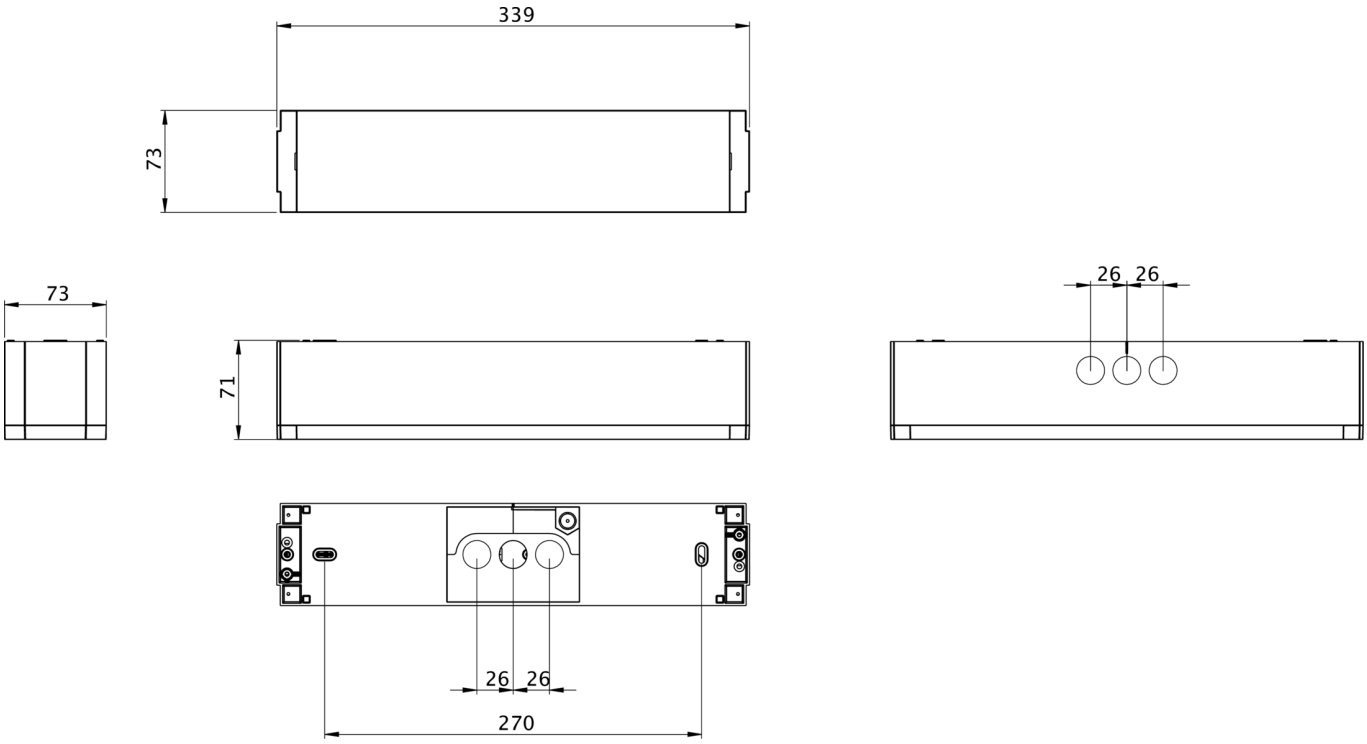

ACCESSORY LIST

PXD-AW - Parallel wall bracket for the PXD emergency and safety light

As of: 02.11.2026 - Subject to technical changes and errors.