



Art.-Nr: KWID413DL-TT

Exit sign

Surface mounting, 3 h, 16 m, IP65, Polycarbonate, White, Set of pictograms

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for ceiling mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Central control and monitoring with standardized fieldbus DALI 2 Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWID413DL-TT




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,2 W
Power maintained	4,7 W
Power non-maintained	1,0 W



Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	93 mm
Width	390 mm
Height	139 mm
Weight	0.79
Weight incl. packaging	0.89
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
Customs tariff number	94056120
GTIN	4262484980964

TECHNICAL DRAWING

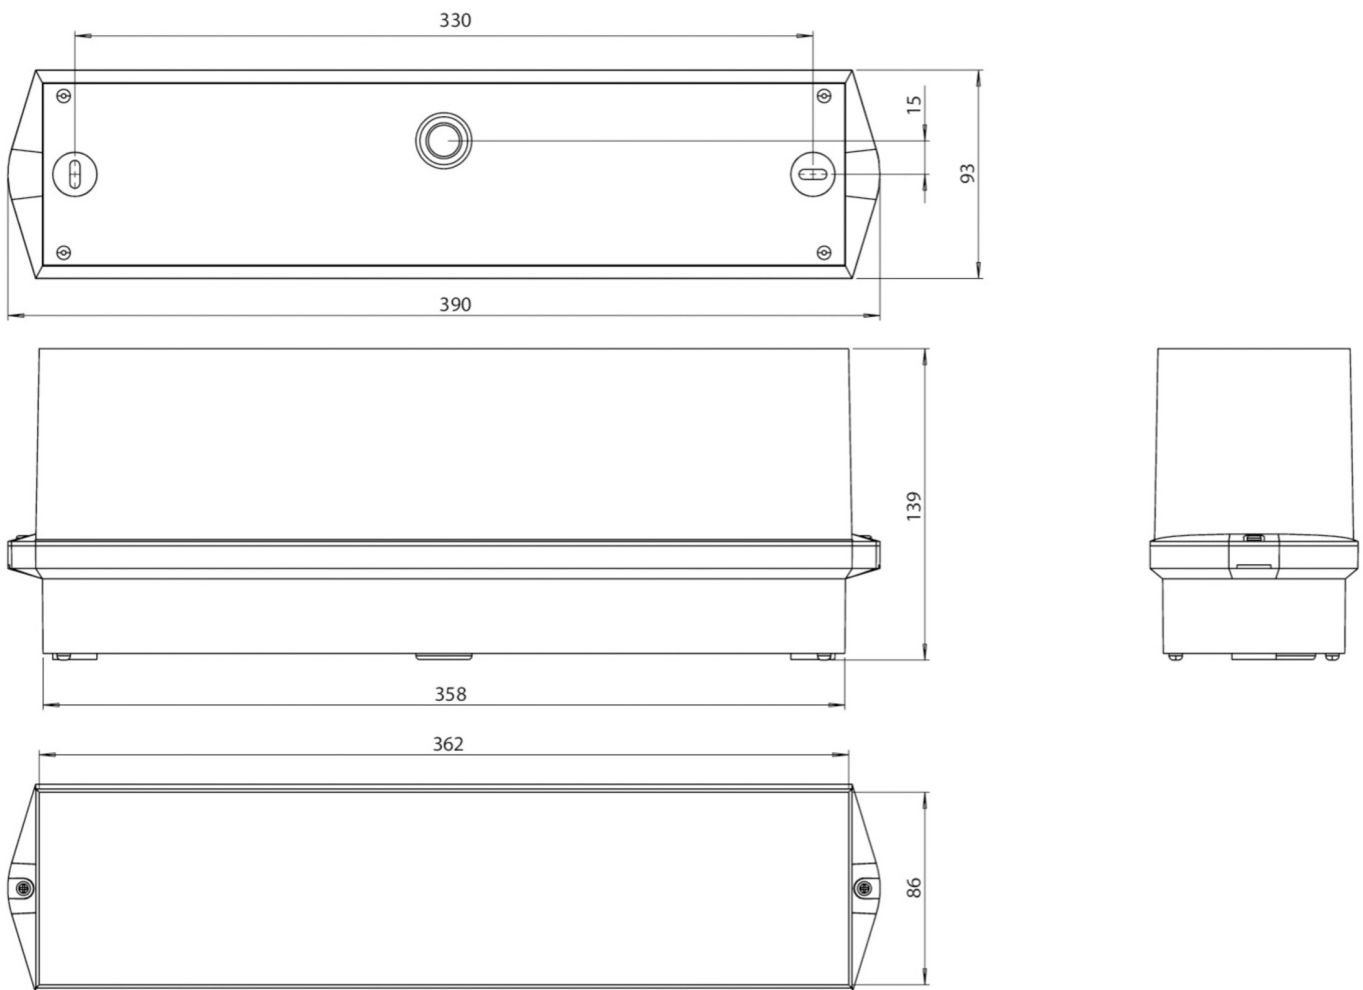



ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

As of: 17.08.2026 - Subject to technical changes and errors.