
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: KWIW423DL-TT
Emergency light
Universal, DALI, 3 h, IP65, Polycarbonate, White, Flexiklick

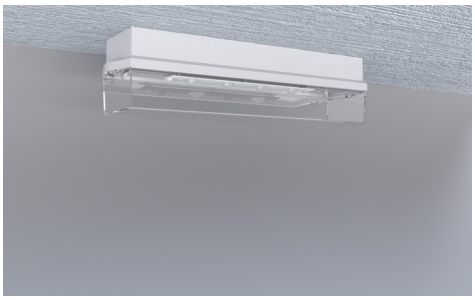

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Central control and monitoring with standardized fieldbus DALI 2 The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.


More information
www.rp-group.com/en/item/KWIW423DL-TT

TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, Waste disposal, D-sign
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,7 W
Power maintained	5,2 W
Power non-maintained	1,0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	86 mm
Width	390 mm

Height	99 mm
Weight	0.72
Weight incl. packaging	0.82
Connection cross-section	2,5 mm²
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484980995

TECHNICAL DRAWING

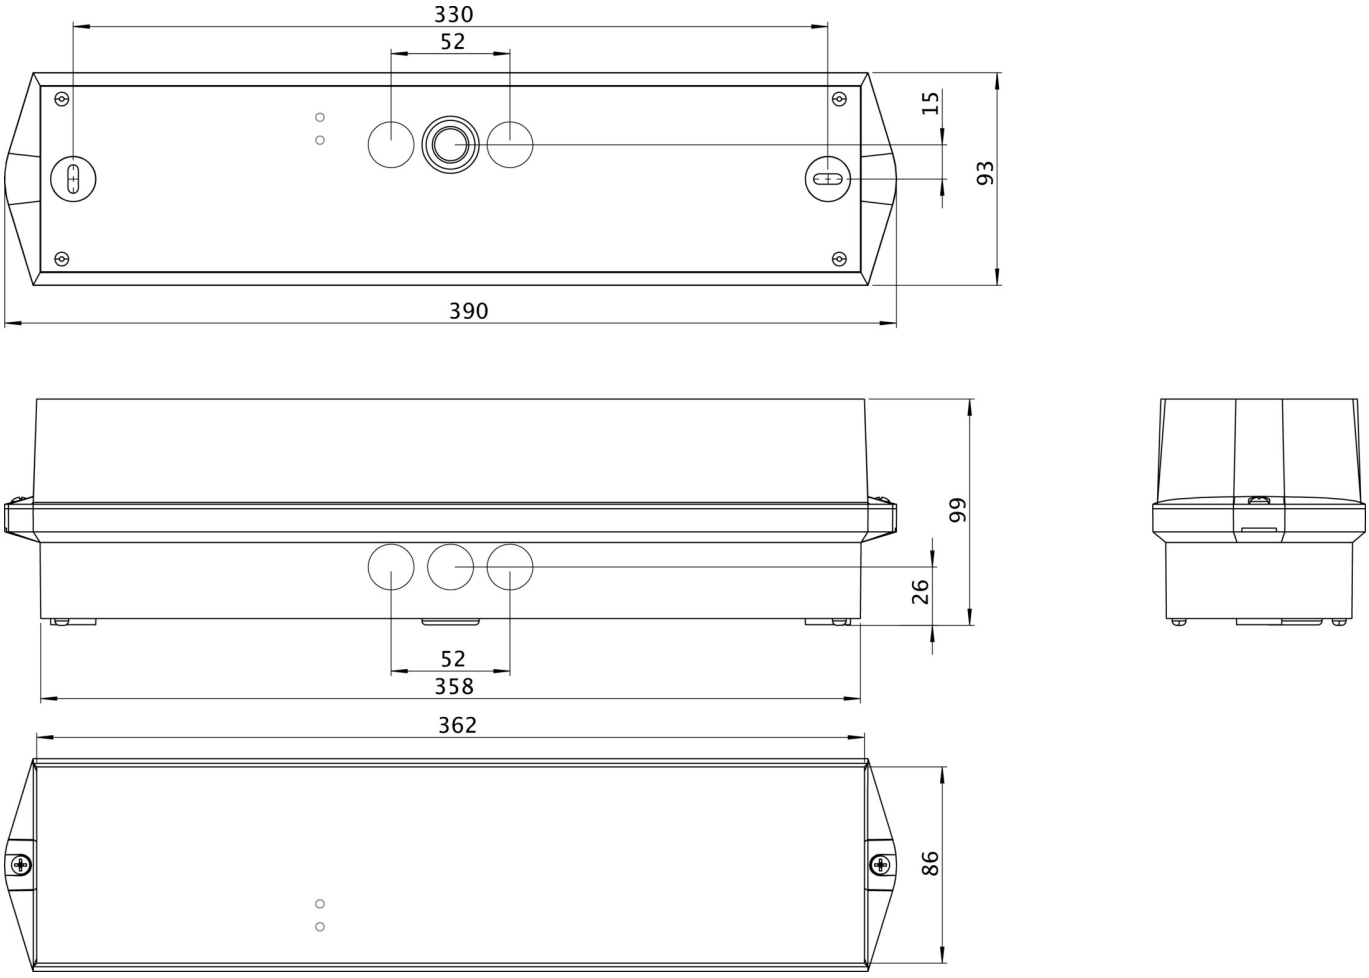

ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame