



Art.-Nr: KWIW423DL-TT
Emergency light
Universal, 3 h, IP65, Polycarbonate, White, Flexiklick

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Central control and monitoring with standardized fieldbus DALI 2 The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens.

The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/KWIW423DL-TT




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	6,7 W
Power maintained	5,2 W
Power non-maintained	1,0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	86 mm
Width	390 mm



Height	99 mm
Weight	0.72
Weight incl. packaging	0.82
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484980995

TECHNICAL DRAWING

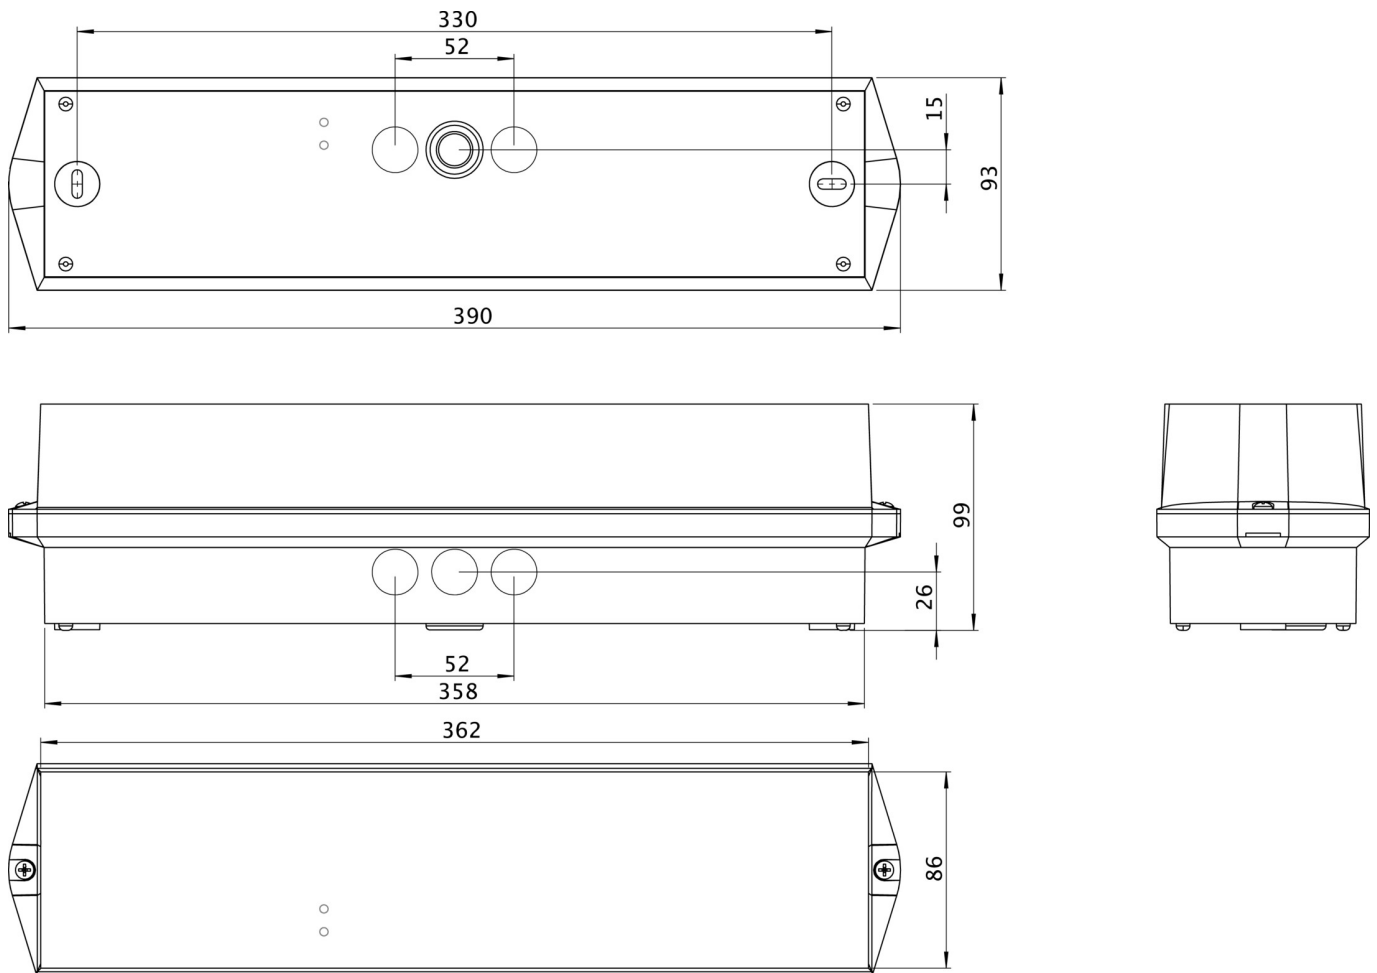

ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

As of: 17.08.2026 - Subject to technical changes and errors.