



Art.-Nr: PMW403DL-TT

Exit sign

Wall mounting, 3 h, 20 m, IP65, Polycarbonate, White, Set of pictograms

Polycarbonate LED emergency exit sign luminaire with convex shaped cover for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Central control and monitoring with standardized fieldbus DALI 2 Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.



More information

www.rp-group.com/en/item/PMW403DL-TT



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign, HACCP
Insulation class	2
Monitoring	DALI
Bridging time	3 h
Battery	LiFePO4 3,2 V/3,3 Ah
Power max.	4,6 W
Power maintained	3,1 W



Power non-maintained	1,0 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.69
Weight incl. packaging	0.82
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
Customs tariff number	94056180
GTIN	4262484981039



TECHNICAL DRAWING

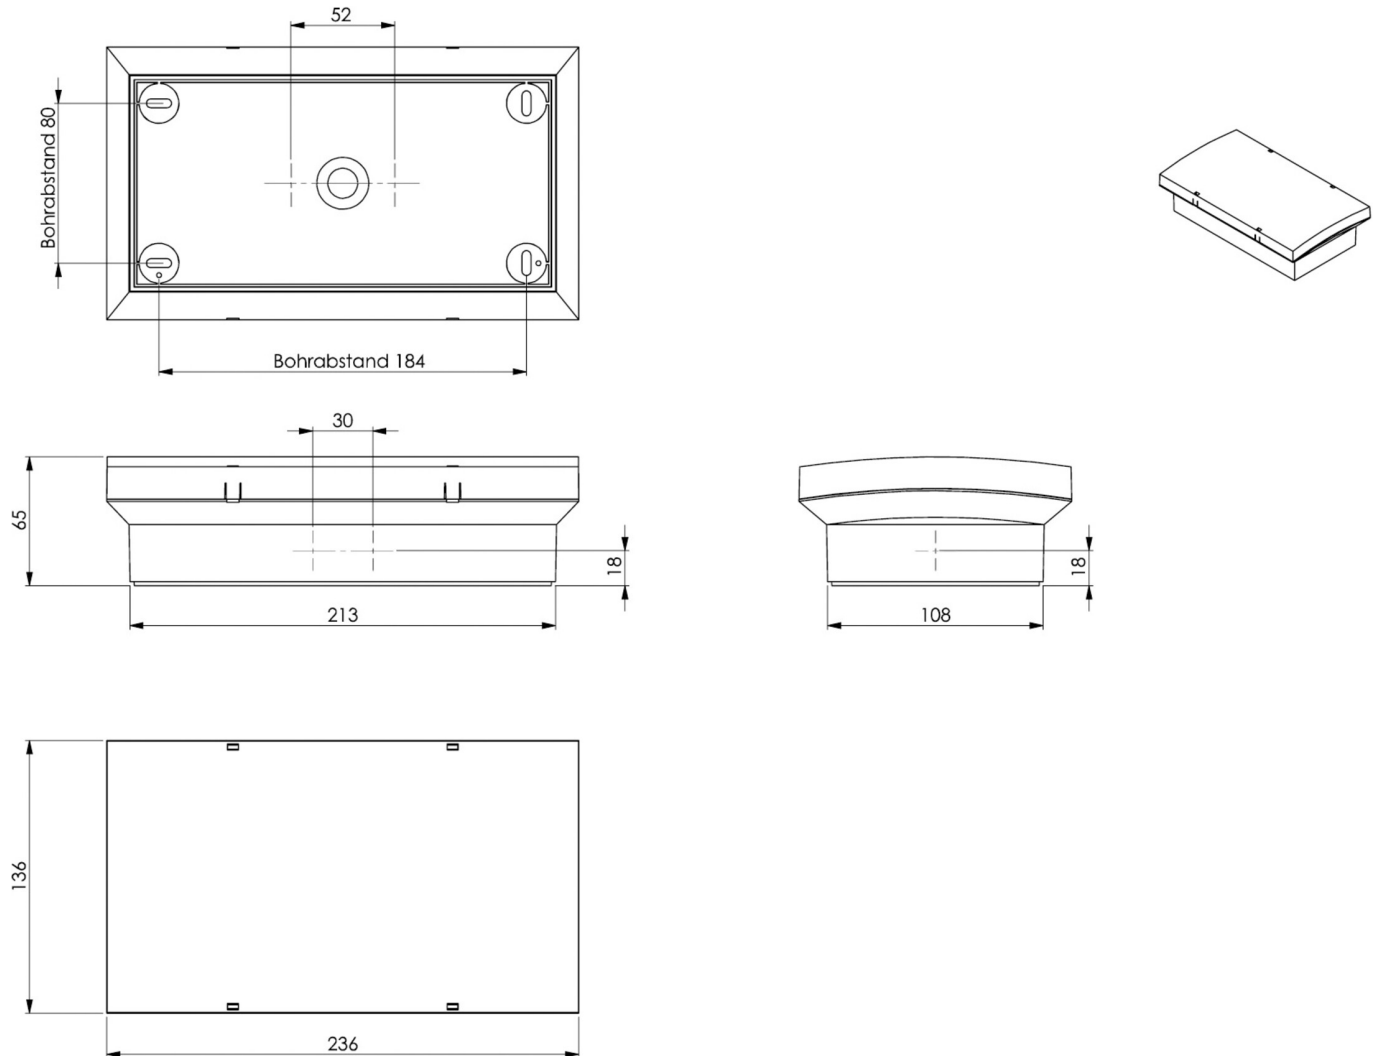

ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

PM-PIKTOSETSONDER.01 -

As of: 07.08.2026 - Subject to technical changes and errors.