
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXW421WL
Emergency light Self-contained
Wall mounting, Wireless Professional (WL), 1 h, 30 m, IP65, PCABS, Polycarbonate, White, Flexiklick

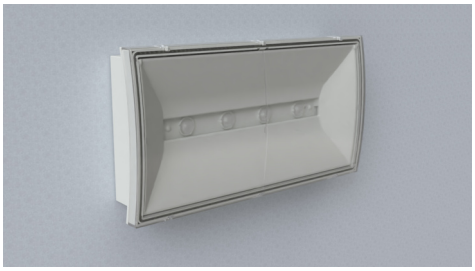

Polycarbonate LED safety light with a convex-shaped cover. Leveling screws are integrated for easy installation on uneven surfaces.

Primarily designed for ceiling mounting; also suitable for wall mounting when used with the corresponding lenses.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with **Wireless Professional**. The luminaire is fitted with the innovative **flexible plug-in system** for rapid use of the right lens. The square lens is pre-mounted and supplied with every luminaire. A corridor, round lens, spotlight lens and beam lens are available as options.


More information
www.rp-group.com/en/item/PXW421WL

TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	1 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 Hz

Power max.	7,5 W
Power maintained	5,7 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	68 mm
Width	320 mm
Height	168 mm
Weight	0.86
Weight incl. packaging	0.95
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484981497

TECHNICAL DRAWING

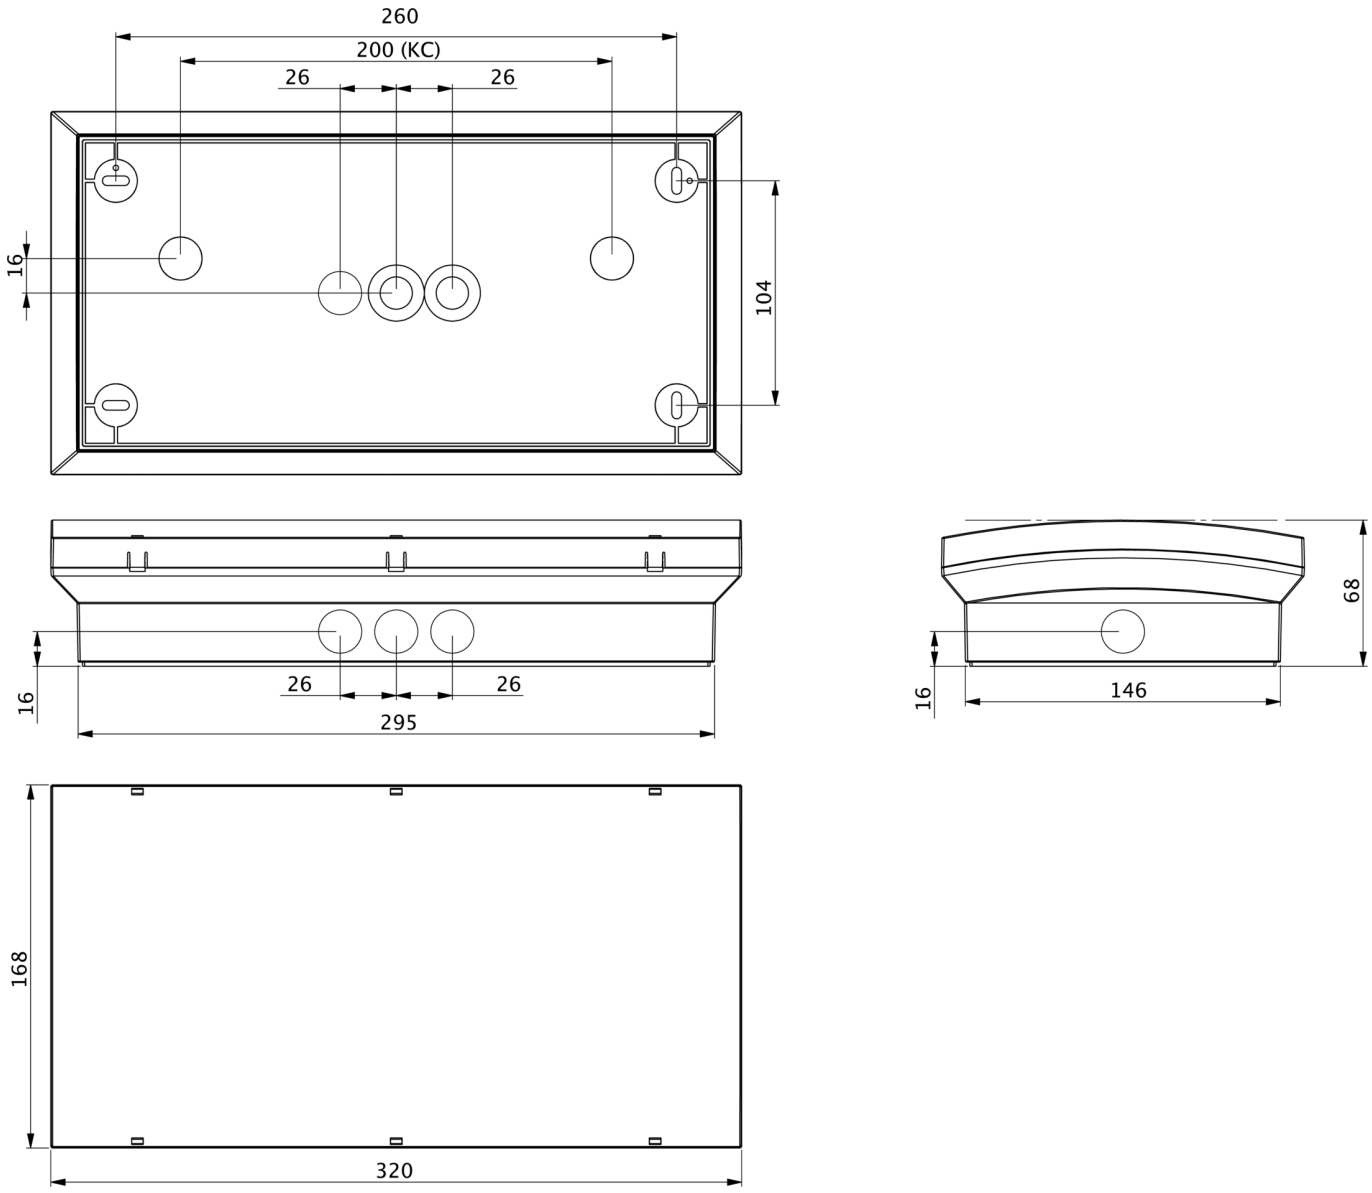

ACCESSORY LIST

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 02.11.2026 - Subject to technical changes and errors.