
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXW428SC
Emergency light Self-contained Universal, SelfControl (SC), 8 h, 30 m, IP65, PCABS, Polycarbonate, White, Flexiklick

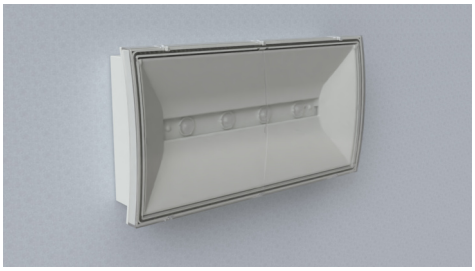

Polycarbonate LED safety light with a convex-shaped cover. Leveling screws are integrated for easy installation on uneven surfaces.

Primarily designed for ceiling mounting; also suitable for wall mounting when used with the corresponding lenses.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The square lens is pre-mounted and supplied with every luminaire. A corridor, round lens, spotlight lens and beam lens are available as options.

More information
www.rp-group.com/en/item/PXW428SC

TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 250 V
Input frequency	50 Hz



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Power max.	6,7 W
Power maintained	5,2 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	68 mm
Width	320 mm
Height	168 mm
Weight	0.92
Weight incl. packaging	1.01
Connection cross-section	2,5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
Customs tariff number	94056120
GTIN	4262484981527

TECHNICAL DRAWING

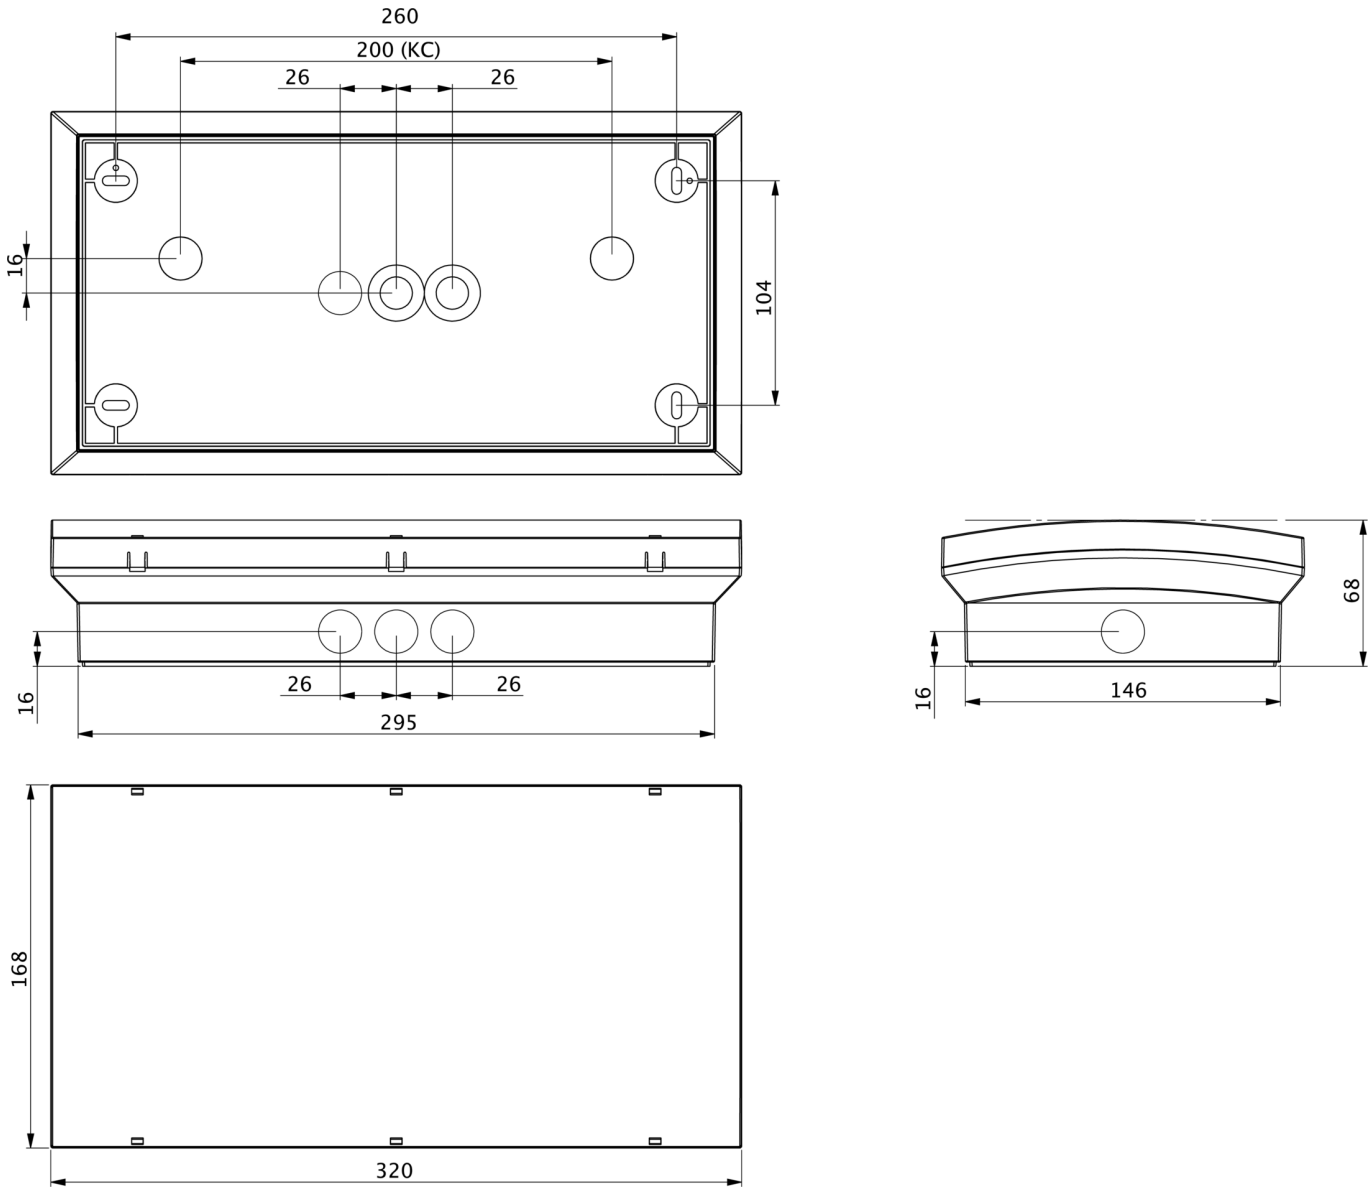

ACCESSORY LIST

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 02.11.2026 - Subject to technical changes and errors.