
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PXW421WL-TT
Emergency light Self-contained
Wall mounting, Wireless Professional (WL), 1 h, 30 m, IP65, PCABS, Polycarbonate, White, Flexiklick

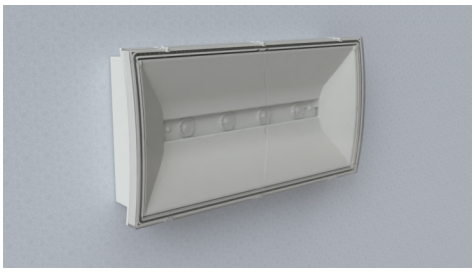

Polycarbonate LED safety light with a convex-shaped cover. Leveling screws are integrated for easy installation on uneven surfaces.

Primarily designed for ceiling mounting; also suitable for wall mounting when used with the corresponding lenses.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with **Wireless Professional**. The luminaire is fitted with the innovative **flexible plug-in system** for rapid use of the right lens. The square lens is pre-mounted and supplied with every luminaire. A corridor, round lens, spotlight lens and beam lens are available as options.

More information
www.rp-group.com/en/item/PXW421WL-TT

TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	PCABS, Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	CE, Waste disposal, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	1 h
Battery	LiFePO4 3,2 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input frequency	50 Hz
Power max.	7,5 W
Power maintained	5,7 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	68 mm
Width	320 mm
Height	168 mm
Weight	0.88
Weight incl. packaging	0.97
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	250 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4262484981558

TECHNICAL DRAWING

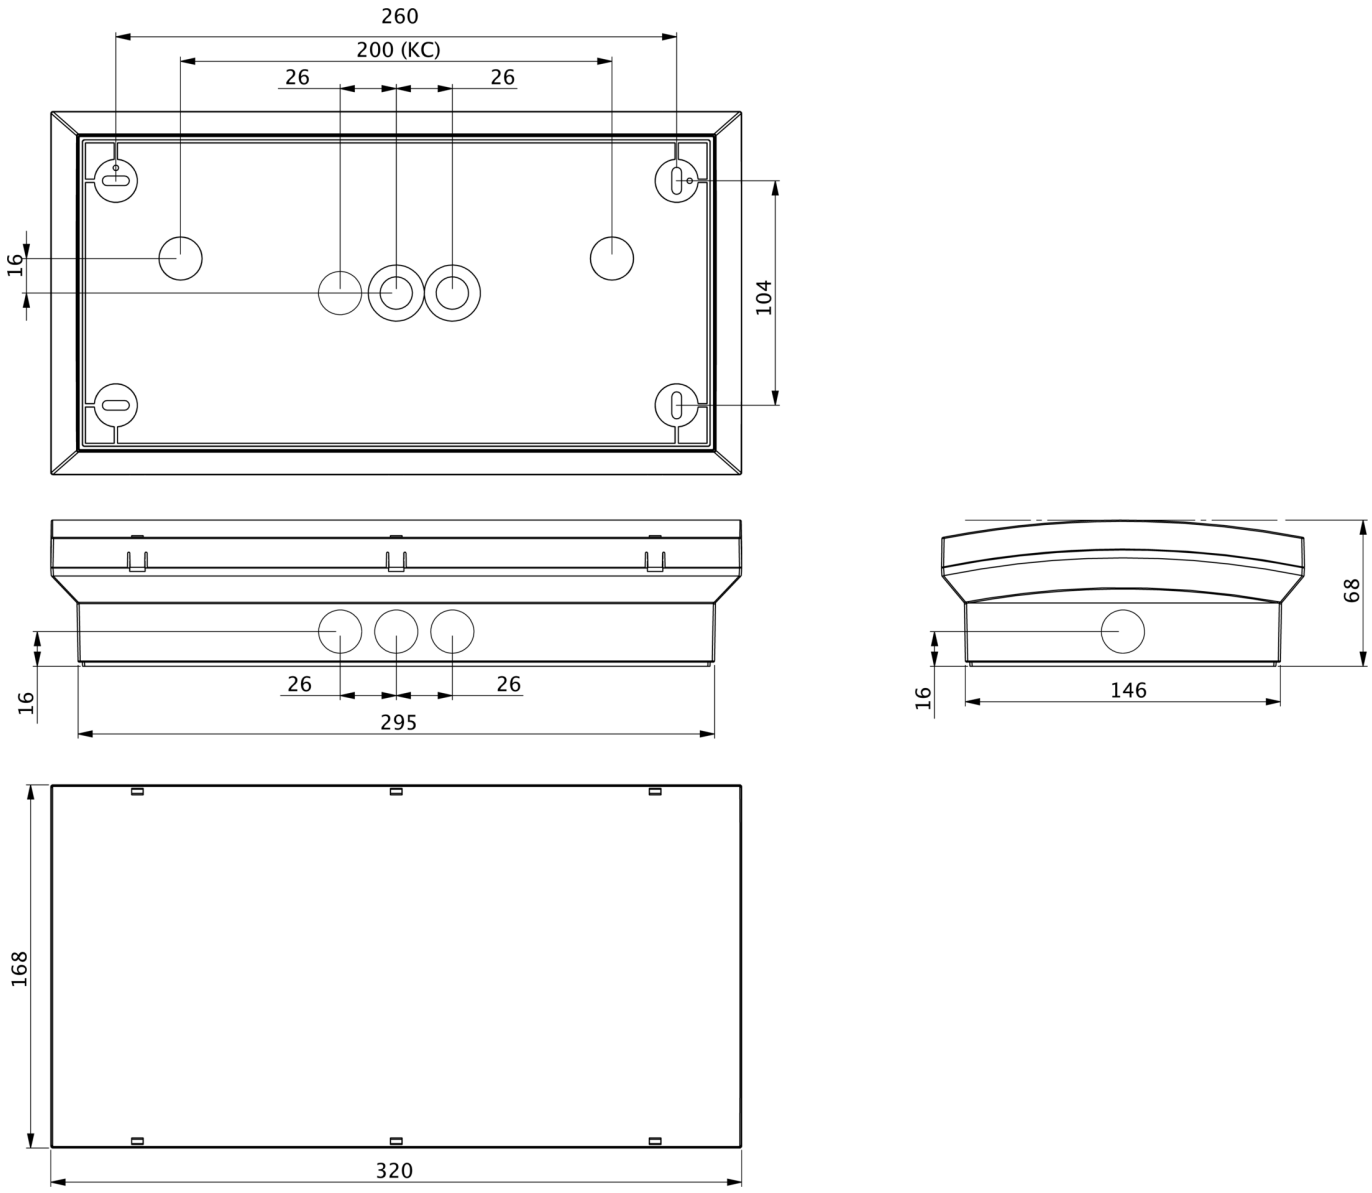

ACCESSORY LIST

PXD-PIKTOSETSONDER.01 - Pictogram set for marking accessible escape routes

As of: 02.11.2026 - Subject to technical changes and errors.