RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: LXD411WL
# Exit sign Self-contained
# Surface mounting, Wireless Professional (WL), 1 h, 34 m, IP40, Aluminum, Anodised aluminium, Set of pictograms



Robust emergency exit sign luminaire made from slim aluminium profile, for ceiling mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

More information
www.rp-group.com/en/item/LXD411WL


## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 34 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminum |
| Housing color | Anodised aluminium |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | Waste disposal, CE |
| Insulation class | 1 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 Hz |

| | |
|---|---|
| Power max. | 5,6 W |
| Power maintained | 4,5 W |
| Power non-maintained | 0,8 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 62 mm |
| Width | 384 mm |
| Height | 214 mm |
| Weight | 1.33 |
| Weight incl. packaging | 1.53 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| GTIN | 4262484982395 |

RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## TECHNICAL DRAWING

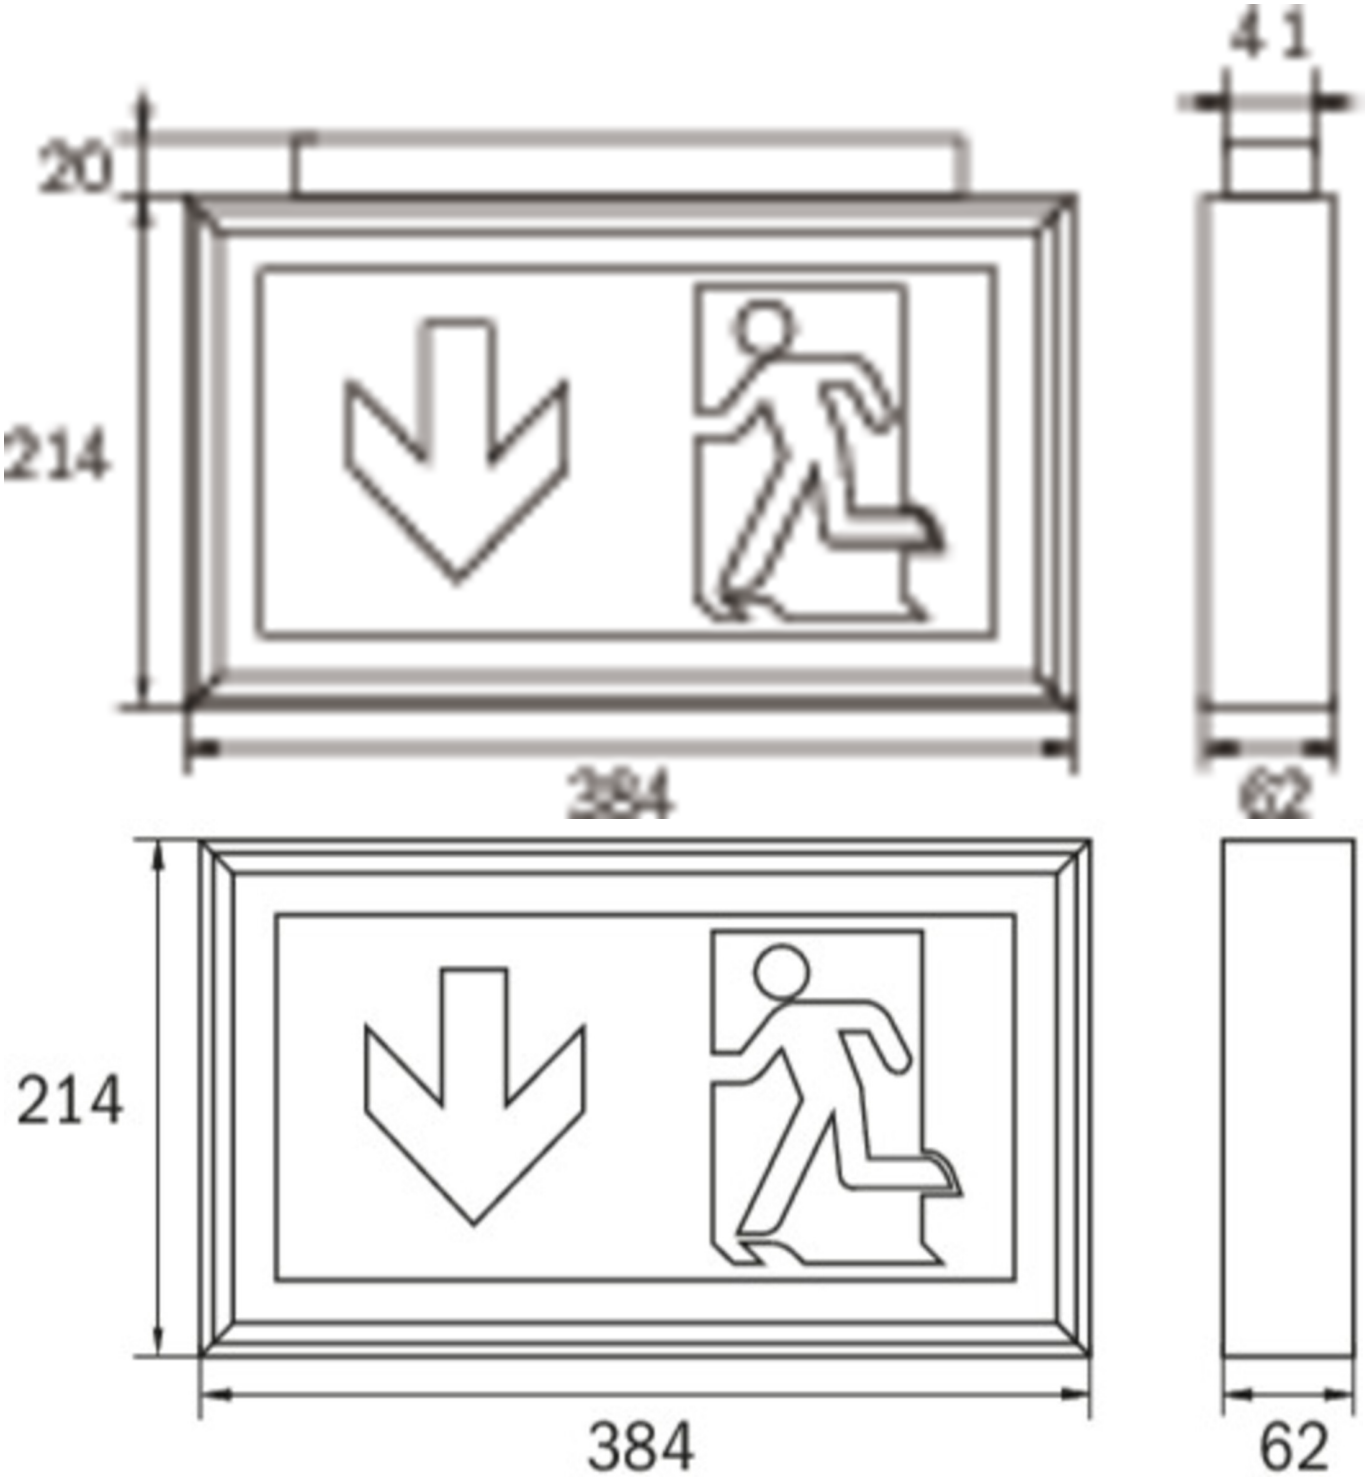

## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

2DS-EB - Professional design pendant pair for emergency lighting - stable and pre-wired