RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: LSD519CC
Exit sign Centralised power supply systems Surface mounting, CoreCompact 24 (CC), CPS, 56 m, IP40, Aluminum, Anodised aluminium, Piktogram as reqired



Robust emergency exit sign luminaire made from slim aluminium profile, for ceiling mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central 24 V low-power system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE

More information
www.rp-group.com/en/item/LSD519CC

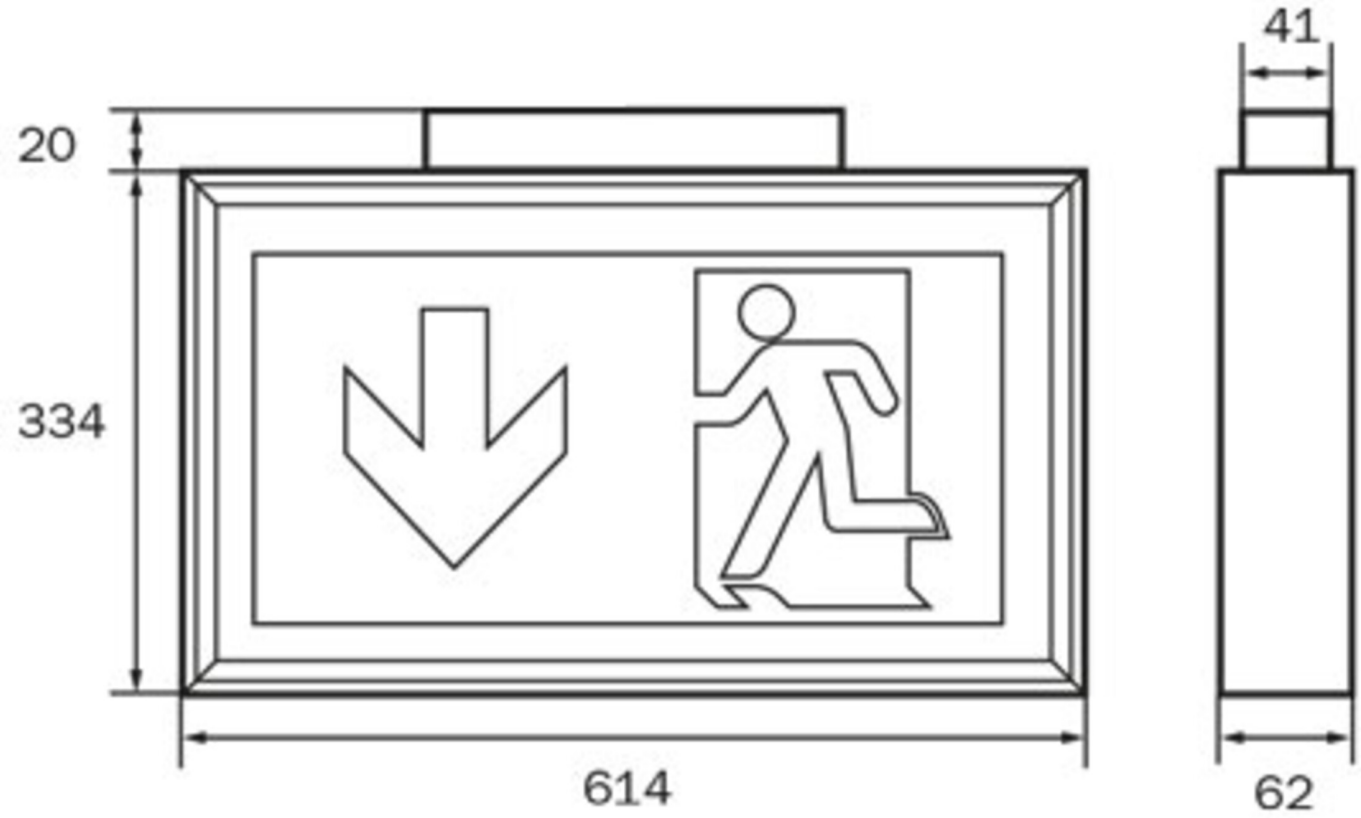
TECHNICAL DATA

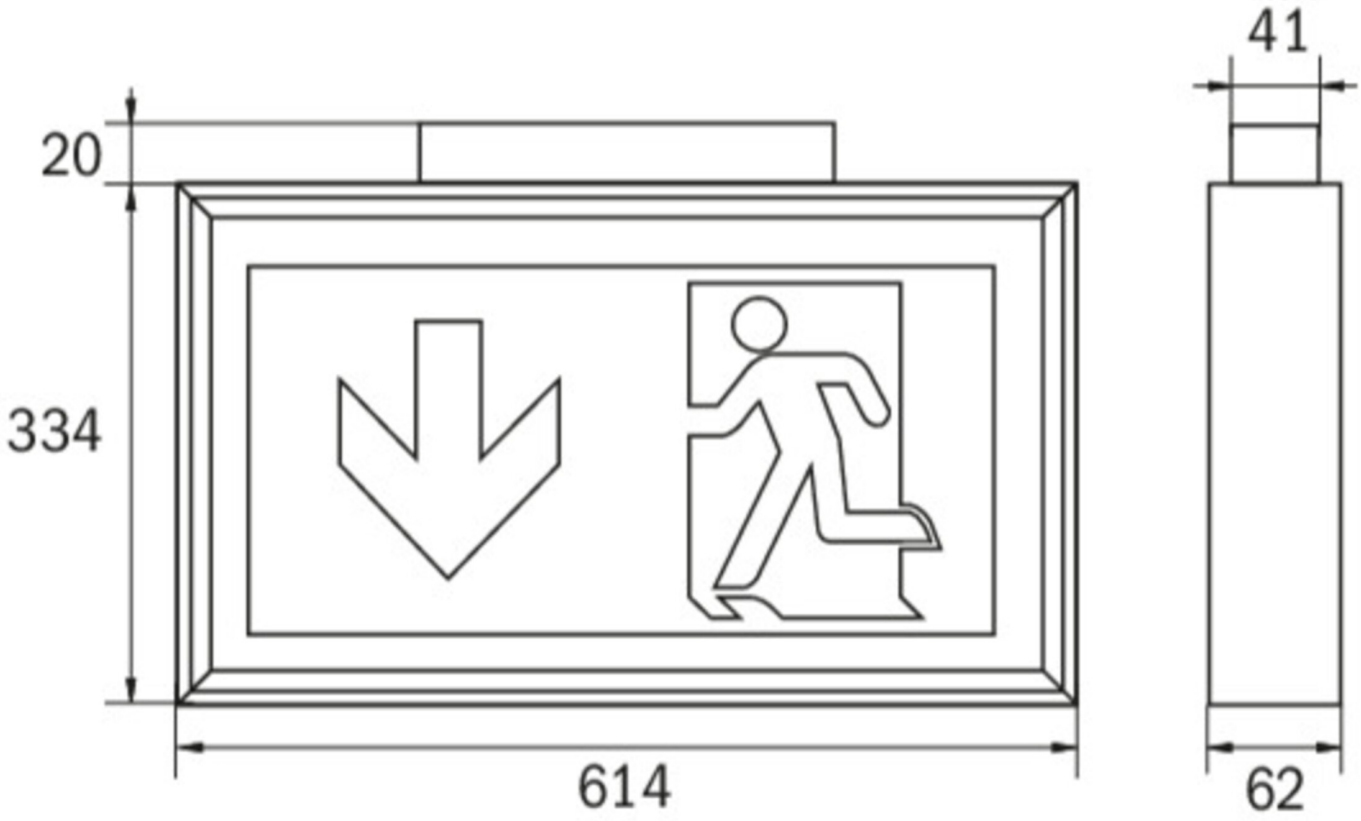
Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminum
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	4,1 W
Power maintained	4,1 W

Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.19
Weight incl. packaging	2.24
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
GTIN	4262484984924

RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING


41
20
334
614
62


41
20
334
614
62

ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant