RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: LXW519CC
Exit sign Centralised power supply systems Wall mounting, CoreCompact 24 (CC), CPS, 56 m, IP40, Aluminum, Anodised aluminium, Piktogram as reqired



Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

Control and monitoring via central 24 V low-power system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.

CE


More information
www.rp-group.com/en/item/LXW519CC

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminum
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	3,4 W
Power maintained	3,4 W

Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.85
Weight incl. packaging	2.9
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	230 lm
Luminous flux emergency	230 lm
GTIN	4262484984948

TECHNICAL DRAWING

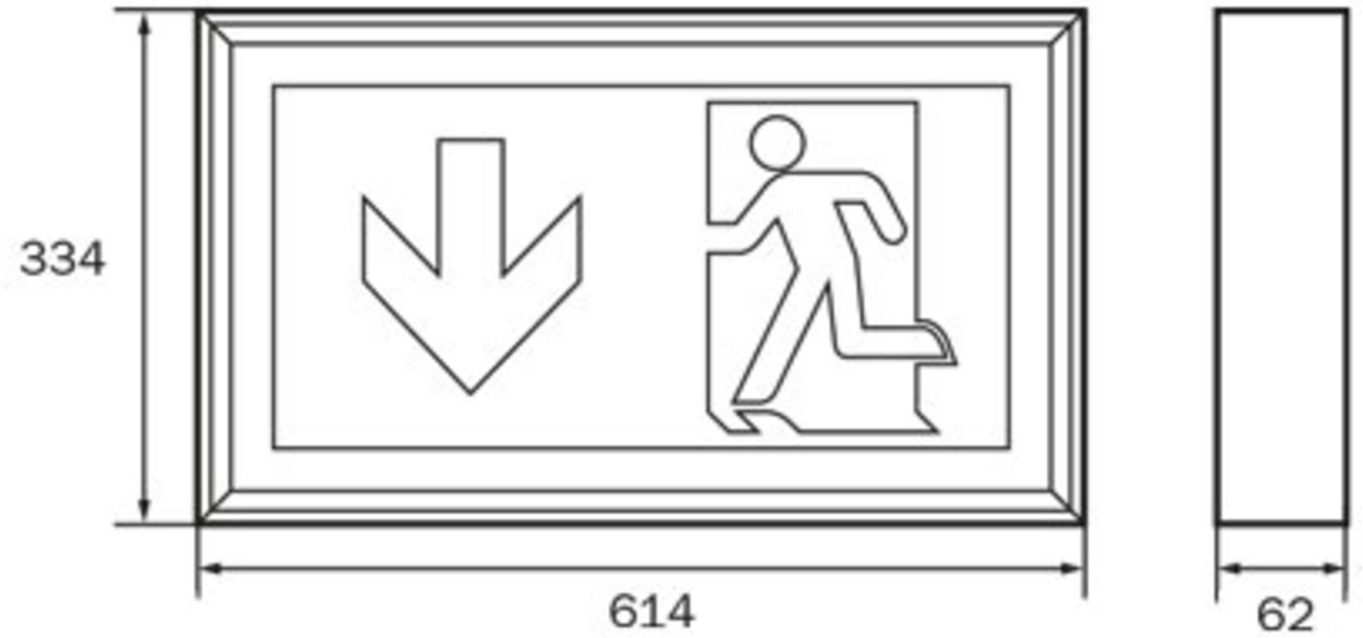

As of: 16.09.2026 - Subject to technical changes and errors.