




**Art.-Nr: LFU15423WL-CCT-BM**

**Wall mounting, Surface mounting, Wireless Professional (WL), 3 h, IP66, Polycarbonate, Light grey**

LED diffuser, VASCA series. Polycarbonate housing. Prismatic diffuser made of UV-resistant PC. The diffuser is attached with stainless steel clips. The LED circuit board is individually replaceable. The luminaire also features through-wiring.

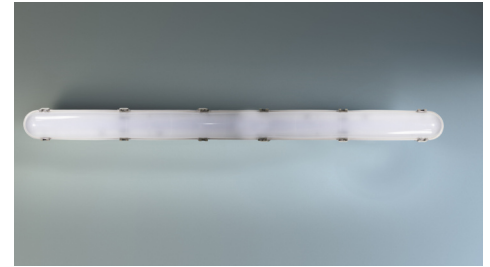

The wattage (36 - 55W / 4400 - 7700lm) and color temperature (3000 - 4000 - 5000K) are individually adjustable via DIP switches.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional.



More information

[www.rp-group.com/en/item/LFU15423WL-CCT-BM](http://www.rp-group.com/en/item/LFU15423WL-CCT-BM)




**TECHNICAL DATA**

|                        |                                 |
|------------------------|---------------------------------|
| Luminaire type         | Emergency light, General light  |
| Mounting               | Wall mounting, Surface mounting |
| Pictograph             | No                              |
| Illuminant             | LED                             |
| Housing material       | Polycarbonate                   |
| Housing color          | Light grey                      |
| Protection type (IP)   | IP66                            |
| Impact resistance (IK) | 8                               |
| Certification          | CE, Waste disposal              |
| Insulation class       | 1                               |
| Supply                 | Self-contained                  |
| Monitoring             | Wireless Professional (WL)      |
| Bridging time          | 3 h                             |
| Battery                | LiFePO4 3,2 V/3,3 Ah            |
| Operating mode         | Non-maintained / maintained     |
| Input voltage AC       | 230 V                           |
| Input frequency        | 50 Hz                           |
| Power max.             | 42 W                            |



|                                         |                     |
|-----------------------------------------|---------------------|
| Power maintained                        | 38 W                |
| Power non-maintained                    | 0,8 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 1560 mm             |
| Width                                   | 82 mm               |
| Height                                  | 97 mm               |
| Weight                                  | 2.38                |
| Weight incl. packaging                  | 2.73                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 6000 lm             |
| Luminous flux emergency                 | 520 lm              |
| EOF                                     | 0.09                |
| GTIN                                    | 4262484985488       |

## TECHNICAL DRAWING

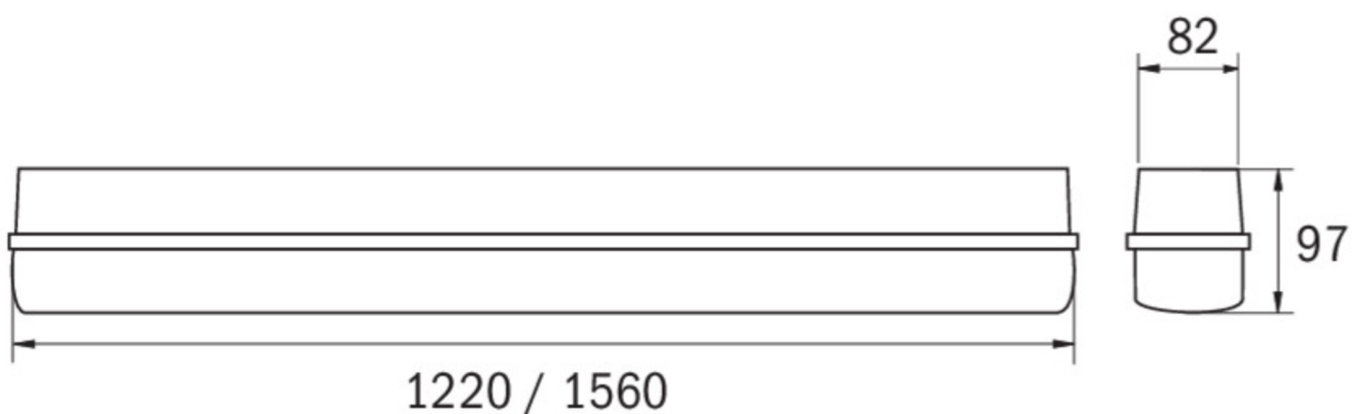

As of: 24.09.2026 - Subject to technical changes and errors.