Art.-Nr: ZPMR403SC-EHE
Emergency light, General light Self-contained soil structure, SelfControl (SC), 3 h, IP65, Zinc die-cast, Anthracite



The bollard light has a smooth cylindrical body with no protruding parts. It is made of die-cast aluminum with an anthracite surface. The light outlet is made of robust, transparent polycarbonate and enables even light distribution around the lamp.

The luminaire is particularly suitable for illuminating outside areas, as well as escape and rescue routes outside the building to a safe area.

The color temperature is set to 3200K and can be changed to 2700K or 4000K on the lamp.

The lamp has a built-in heater, which allows it to function reliably even at low temperatures.

Automatic monitoring of safety luminaire with SelfControl.

CE

More information
www.rp-group.com/en/item/ZPMR403SC-EHE

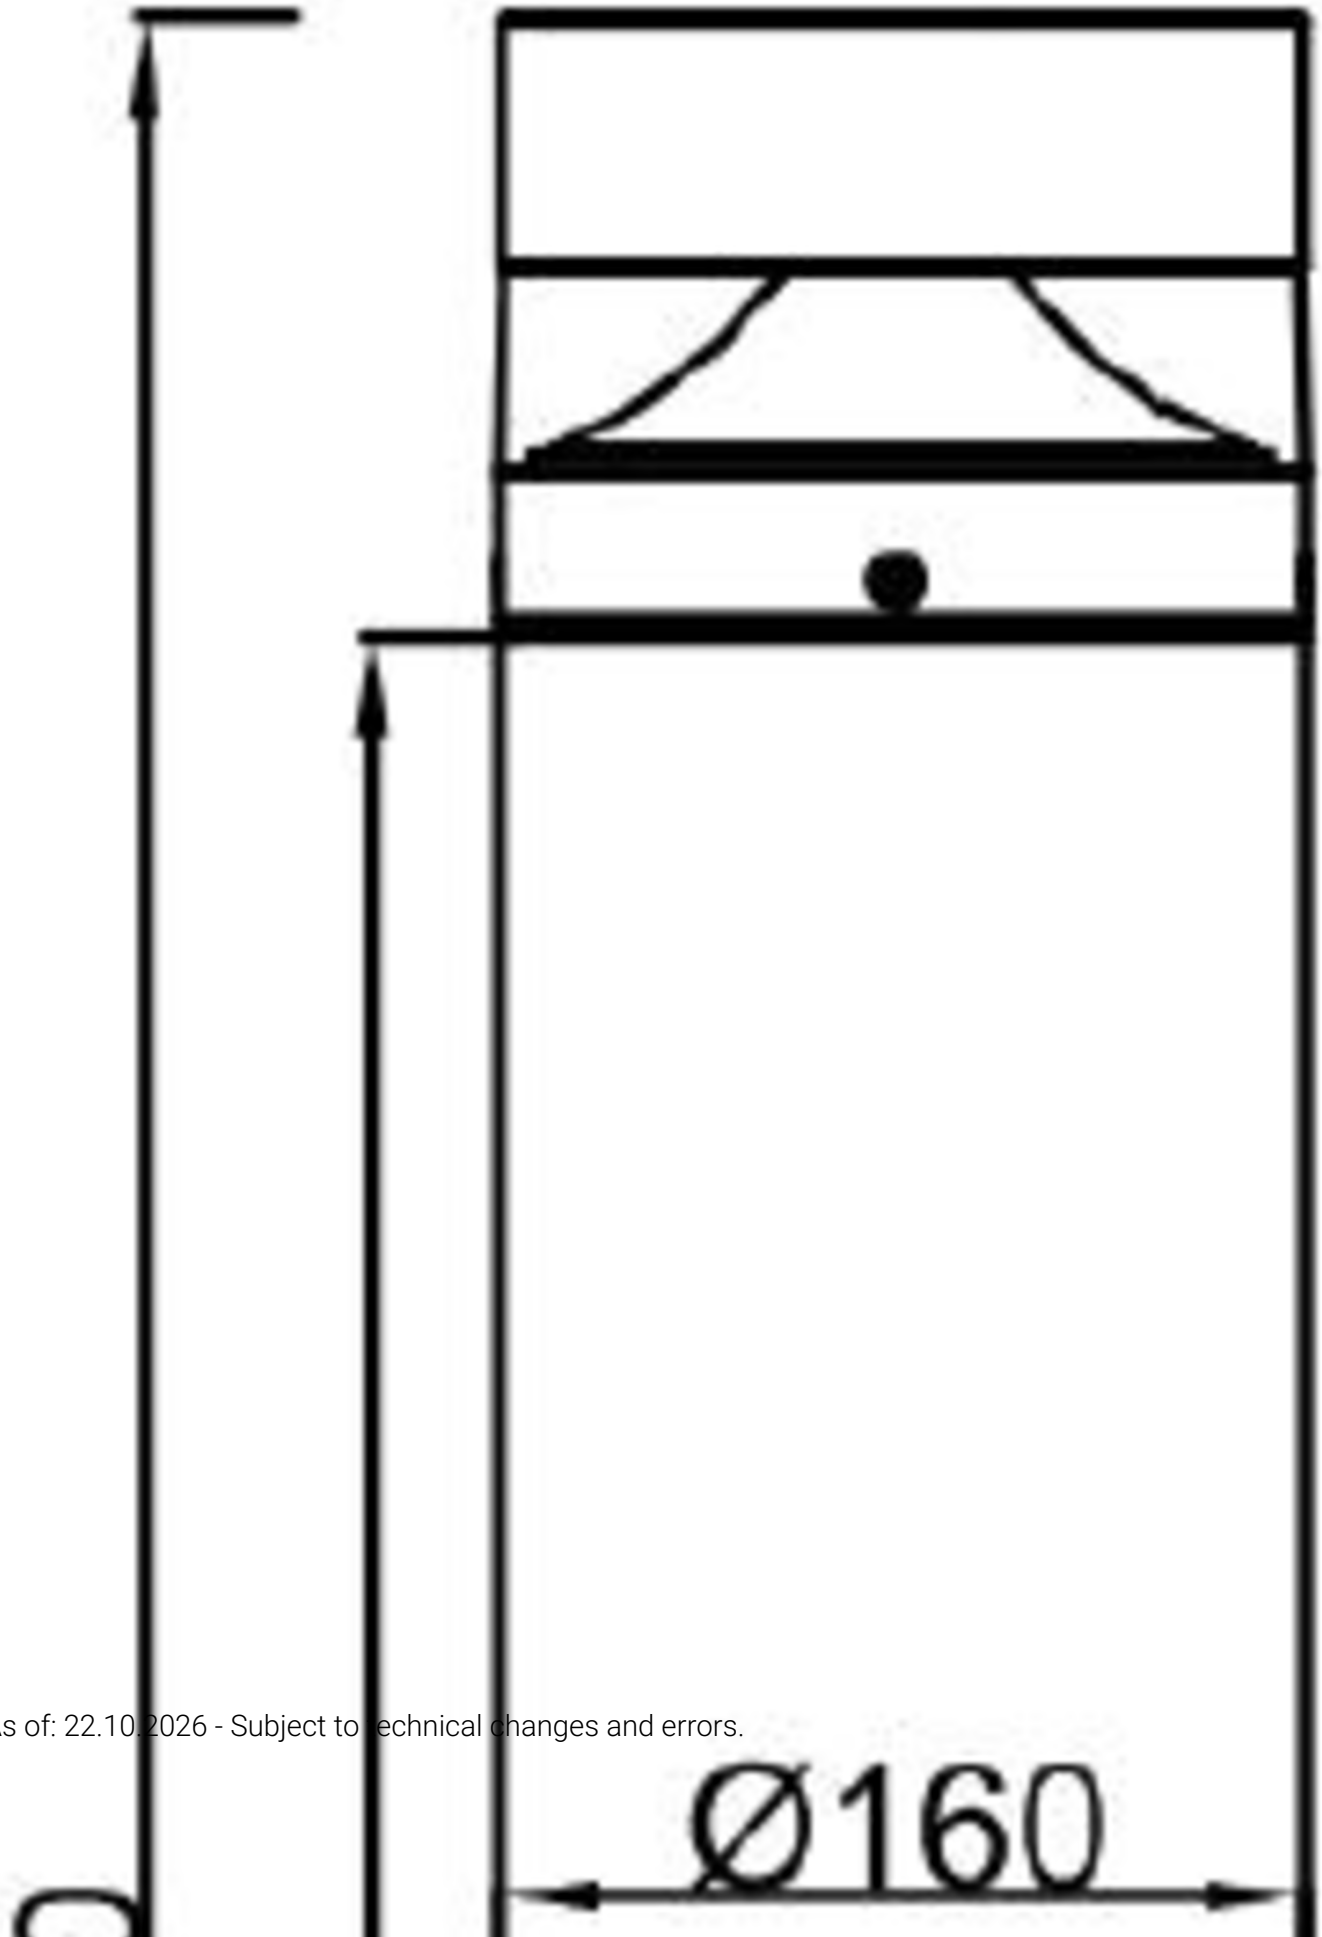
TECHNICAL DATA

Luminaire type	Emergency light, General light
Mounting	soil structure
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP65
Impact resistance (IK)	10
Certification	CE, Waste disposal
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/
Operating mode	Non-maintained / maintained
Input voltage AC	220 V - 240 V

Input frequency	50 / 60 Hz
Power max.	30 W
Power maintained	11,5 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-20 °C to 50 °C
Ambient temperature non-maintained mode	-20 °C to 50 °C
Height	800 mm
Diameter	160 mm
Weight	6.08
Weight incl. packaging	6.68
Connection cross-section	1,5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	610 lm
Luminous flux emergency	200 lm
EOF	0.33
Customs tariff number	94056180
GTIN	4262484986553

RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING


Ø160