



**Art.-Nr: AGD009**

**Exit sign Centralised power supply systems**

**Recessed mounting, Without monitoring, CPS, 50m, IP40,  
Zinc die-cast, white**

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information  
[www.rp-group.com/en/item/AGD009](http://www.rp-group.com/en/item/AGD009)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	50m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Zinc die-cast
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz



Input voltage DC	100-254 V
Power max.	5,2 W
Power DS	5,2 W
Power BS	0 W
Ambient temperature DS	-5 °C to 40 °C
Ambient temperature BS	-5 °C to 40 °C
Depth	80 mm
Width	517 mm
Height	330 mm
Weight	2.64
Weight incl. packaging	3.29
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
EAN	4260659565237



## TECHNICAL DRAWING

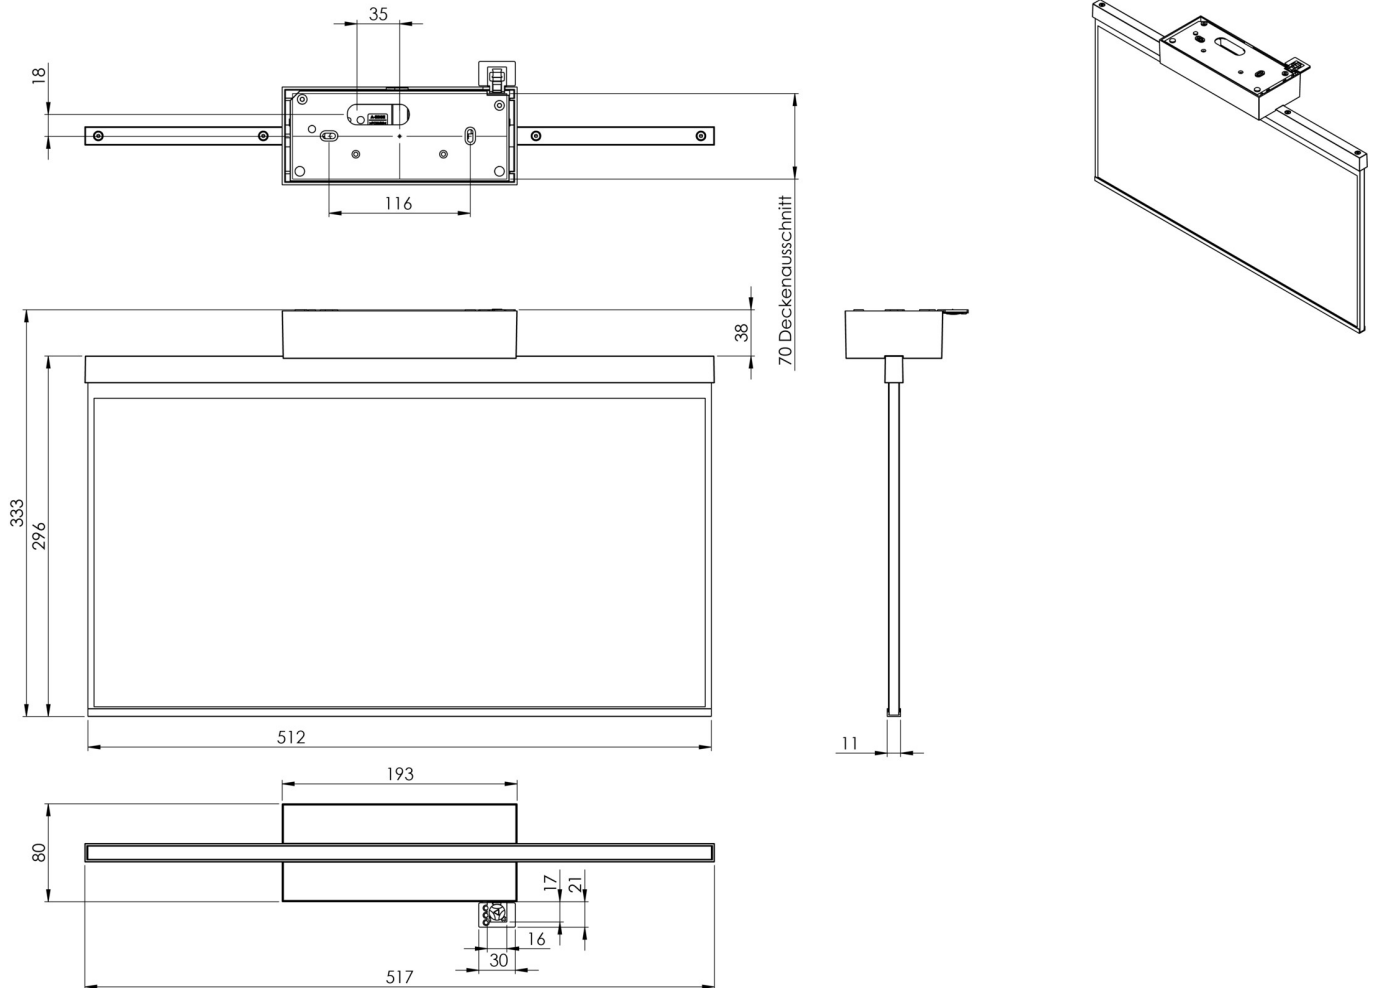

## ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX

As of: 29.01.2025 - Subject to technical changes and errors.