



#### Art.-Nr: AGD009ML-AZ Exit sign Centralised power supply systems Recessed mounting, Central power supply (ML), CPS, 50m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information www.rp-group.com/en/item/AGD009ML-AZ



### **TECHNICAL DATA**

CE

| Luminaire type         | Exit sign                        |
|------------------------|----------------------------------|
| Mounting               | Recessed mounting                |
| Recognition distance   | 50m                              |
| Pictograph             | acc. to Specification            |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Anthracite                       |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltageAC        | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |






| Input voltage DC         | 216 V          |
|--------------------------|----------------|
| Power max.               | 6,1 W          |
| Power DS                 | 6,1 W          |
| Power BS                 | 1,1 W          |
| Ambient temperature DS   | -5 °C to 40 °C |
| Ambient temperature BS   | -5 °C to 40 °C |
| Depth                    | 80 mm          |
| Width                    | 517 mm         |
| Height                   | 330 mm         |
| Weight                   | 2.67           |
| Weight incl. packaging   | 3.32           |
| Connection cross-section | 2.5 mm²        |
| Switching input          | Yes            |
| Emergency light blocking | No             |
| Battery connection       | No             |
| Dimming function         | Yes            |
| Customs tariff number    | 94056180       |
| EAN                      | 4260659565275  |





# **TECHNICAL DRAWING**

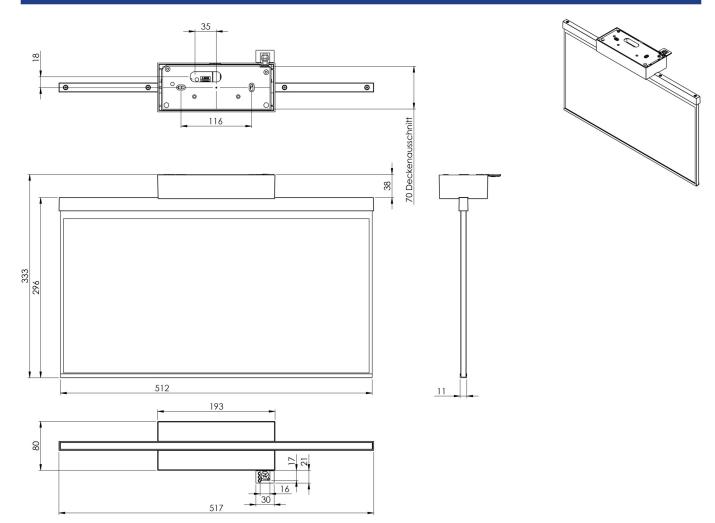

## ACCESSORY LIST

AM-X-APA-AZ -





## **RELATED PRODUCTS**

| ArtNo.     | lmage | Monitoring                   | Supply                  | Color     | Investment | Automatic log | Maintenance<br>level | Remote main-<br>tenance | max. luminai-<br>res  | Single luminai-<br>re monitoring |
|------------|-------|------------------------------|-------------------------|-----------|------------|---------------|----------------------|-------------------------|-----------------------|----------------------------------|
| AGD009ML   | \$ →  | Central power<br>supply (ML) | Central power<br>supply | RAL 9003  | €€€        | Yes           | low                  | Yes                     | 1,920 per sys-<br>tem | central                          |
| AGD009ML-E |       | Central power<br>supply (ML) | Central power<br>supply | Edelstahl | €€€        | Yes           | low                  | Yes                     | 1,920 per sys-<br>tem | central                          |

As of: 29.01.2025 - Subject to technical changes and errors.