



Art.-Nr: AGR009ML-E

Exit sign Centralised power supply systems

**Recessed wall mounting, Central power supply (ML), CPS,
50m, IP40, Zinc die-cast, Stainless steel**

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.



More information

www.rp-group.com/en/item/AGR009ML-E



TECHNICAL DATA


| | |
|------------------------|----------------------------------|
| Luminaire type | Exit sign |
| Mounting | Recessed wall mounting |
| Recognition distance | 50m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |



| | |
|--------------------------|---------------------|
| Power max. | 6,1 W |
| Power DS | 6,1 W |
| Power BS | 1,1 W |
| Ambient temperature DS | -5 °C to 40 °C |
| Ambient temperature BS | -5 °C to 40 °C |
| Depth | 73 mm |
| Width | 517 mm |
| Height | 296 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 2.52 |
| Weight incl. packaging | 3.17 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| EAN | 4260659565817 |



TECHNICAL DRAWING

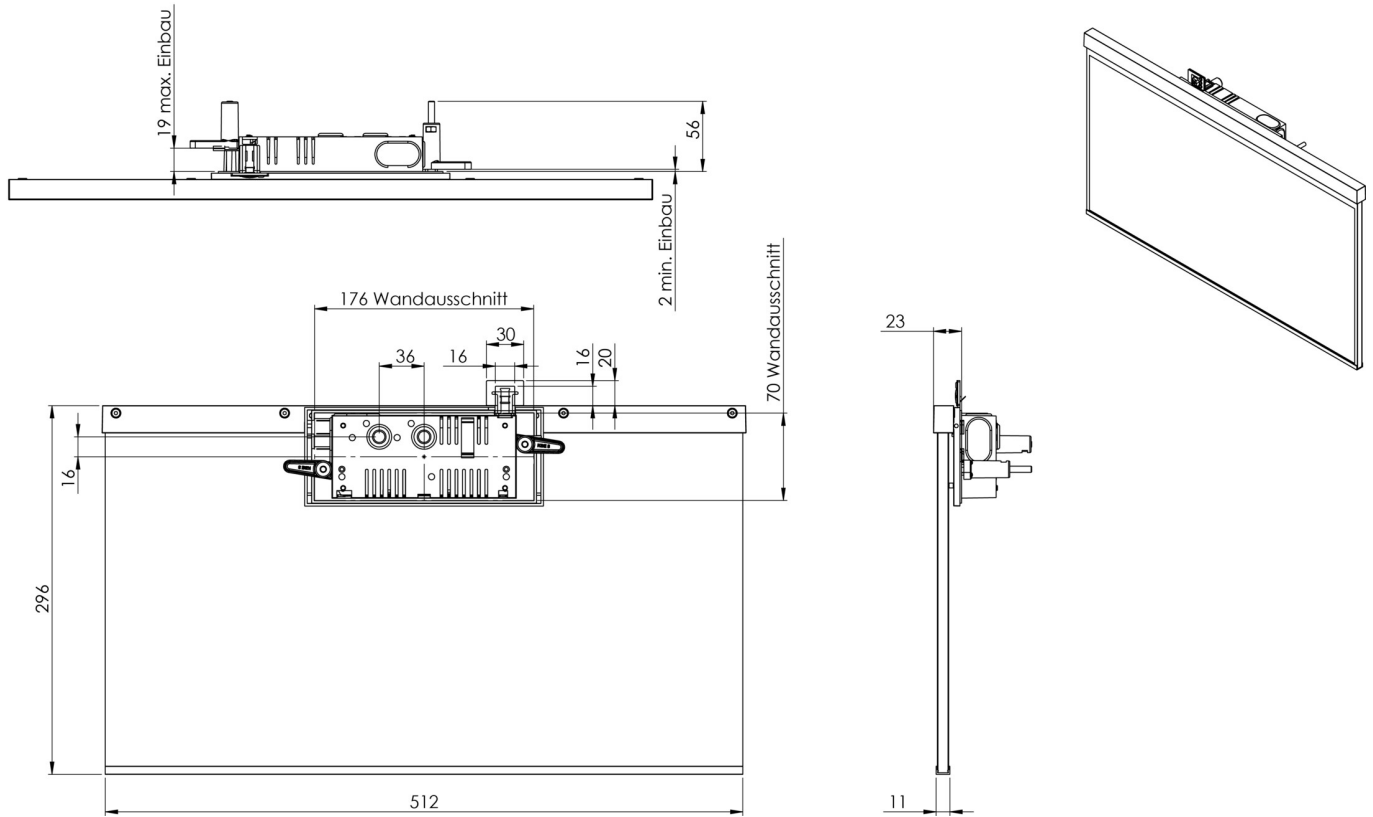

RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|-------------|-------|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AGR009ML | | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |
| AGR009ML-AZ | | Central power supply (ML) | Central power supply | RAL 7016 | €€€ | Yes | low | Yes | 1,920 per system | central |

As of: 02.01.2025 - Subject to technical changes and errors.