Exit sign
Art.-No.: AIR003SC-E

The AIR is a zinc-diecast exit sign with recessed wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall
Viewing distance	15 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Colour	Stainless steel look
Mechanical rating IP	40
Impact resistance IK	≥ 3
Protection class	2
Supply	Single battery
Monitoring	Self-Control
Operation time	3 h
Battery	4,8V/2,0Ah NiMH
Operation mode	maintained/non-maintained mode
Input Voltage AC	230 V
Input Frequency Hz	50 / 60 Hz
Power consumption max.	3,7 W
Power consumption maintained	3,7 W
Power consumption non-maintained	1,9 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	58 mm
Width	167 mm

Height	118 mm
Install. dim. diameter	68 mm
Weight	0.69 kg
Weight incl. Packaging	0.94 kg
Connection cross-section	2.5 mm
Switching input L'	Yes
Emergency light blocking	Yes
Battery connector	Plug
Dimming function	Yes
Customs tariff number	94056180
Coutry of origin	Germany
EAN	4260581713393
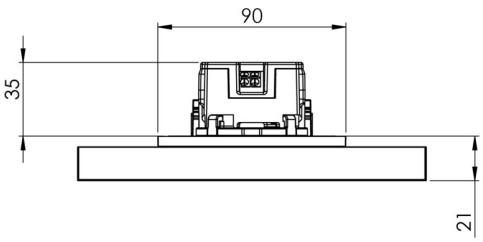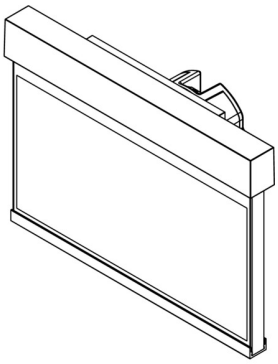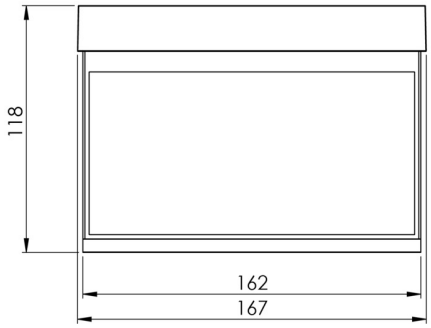
TECHNICAL DRAWING