



Art.-Nr: AMC509CC-AZ Exit sign Centralised power supply systems Ceiling mounting, CoreCompact 24 (CC), CPS, 22 m, IP20, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



((

More information www.rp-group.com/en/item/AMC509CC-AZ



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Ceiling mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V







Power max.	2,8 W			
Power maintained	2,8 W			
Power non-maintained	0,4 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	80 mm			
Width	236 mm			
Height	214 mm			
Installation length	176 mm			
Installation width	68 mm			
Installation height	40 mm			
Weight	1.03			
Weight incl. packaging	1.39			
Connection cross-section	2.5 mm ²			
Switching input	No			
Emergency light blocking	No			
Battery connection	No			
Luminous flux mains	165 lm			
Luminous flux emergency	165 lm			
Customs tariff number	94056180			
GTIN	4260682156167			






TECHNICAL DRAWING

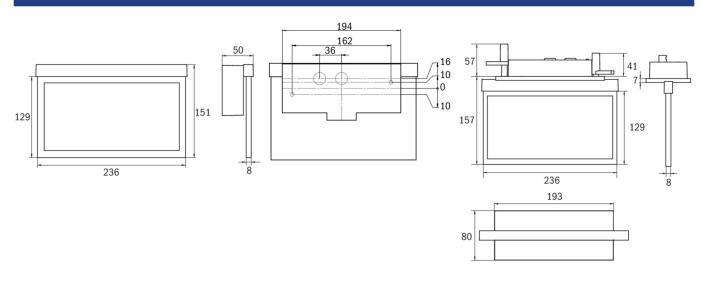



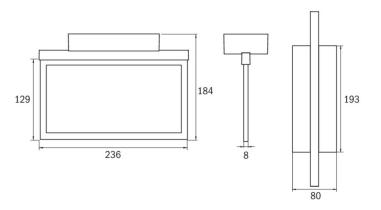

ACCESSORY LIST

AM-XBE -





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMC009ML	₹	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AMC009ML- AZ	F	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AMC009ML-E	₹	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central
AMC509CC	? >	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
AMC509CC-E	₹	CoreCompact 24 (CC)	Central power supply	Edelstahl	€€	Yes	low	Yes		central

As of: 14.12.2025 - Subject to technical changes and errors.