



#### Art.-Nr: AMCC403WL-AZ Exit sign Self-contained Rope ceiling installation, Wireless Professional (WL), 3 h, 22 m, IP20, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire with wire suspension for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.











#### **TECHNICAL DATA**

Luminaire type	Exit sign				
Mounting	Rope ceiling installation				
Recognition distance	22 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	Anthracite				
Protection type (IP)	IP20				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, 5 years warranty				
Insulation class	2				
Supply	Self-contained				
Monitoring	Wireless Professional (WL)				
Bridging time	3 h				
Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				







Input frequency	50 Hz				
Power max.	4,7 W				
Power maintained	3,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	79 mm				
Width	236 mm				
Height	165 mm				
Installation length	176 mm				
Installation width	68 mm				
Installation height	40 mm				
Weight	1.61				
Weight incl. packaging	1.97				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682152831				






# TECHNICAL DRAWING

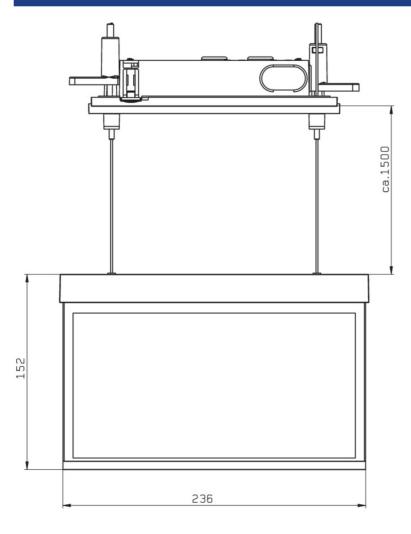

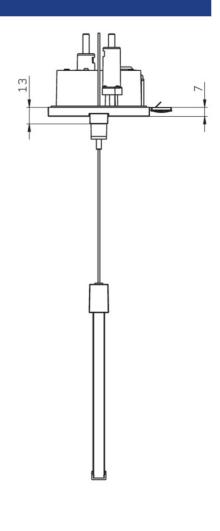

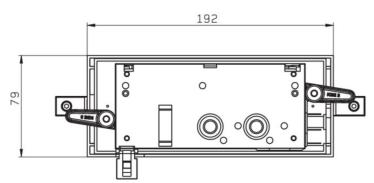





### ACCESSORY LIST

AM-XBE -

LFP3212.K-SET-2AKKU - Battery

# RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMCC403WL	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AMCC403WL- E	<b>A</b>	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.