



Art.-Nr: AMCP003SC Exit sign Self-contained Pendant recessed ceiling, SelfControl (SC), 3 h, 22 m, IP20, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AMCP003SC



TECHNICAL DATA

| Luminaire type | Exit sign | | | | |
|------------------------|-----------------------------|--|--|--|--|
| Mounting | Pendant recessed ceiling | | | | |
| Recognition distance | 22 m | | | | |
| Pictograph | Set | | | | |
| Illuminant | LED | | | | |
| Housing material | Zinc die-cast | | | | |
| Housing color | White | | | | |
| Protection type (IP) | IP20 | | | | |
| Impact resistance (IK) | ≥ 3 | | | | |
| Certification | WEEE, CE | | | | |
| Insulation class | 2 | | | | |
| Supply | Self-contained | | | | |
| Monitoring | SelfControl (SC) | | | | |
| Bridging time | 3 h | | | | |
| Battery | NIMH 4,8 V/2,0 Ah | | | | |
| Operating mode | Non-maintained / maintained | | | | |
| Input voltageAC | 230 V | | | | |







| Input frequency | 50 / 60 Hz | | | | |
|---|---------------------|--|--|--|--|
| Power max. | 4,7 W | | | | |
| Power maintained | 4,7 W | | | | |
| Power non-maintained | 1,95 W | | | | |
| Ambient temperature maintained mode | -5 °C to 40 °C | | | | |
| Ambient temperature non-maintained mode | -5 °C to 40 °C | | | | |
| Depth | 79 mm | | | | |
| Width | 241 mm | | | | |
| Height | 159 mm | | | | |
| Installation length | 176 mm | | | | |
| Installation width | 68 mm | | | | |
| Installation height | 40 mm | | | | |
| Weight | 1.4 | | | | |
| Weight incl. packaging | 1.76 | | | | |
| Connection cross-section | 2.5 mm ² | | | | |
| Switching input | Yes | | | | |
| Emergency light blocking | Yes | | | | |
| Battery connection | Connector | | | | |
| Dimming function | Yes | | | | |
| Customs tariff number | 94056180 | | | | |
| EAN | 4260581713584 | | | | |






TECHNICAL DRAWING

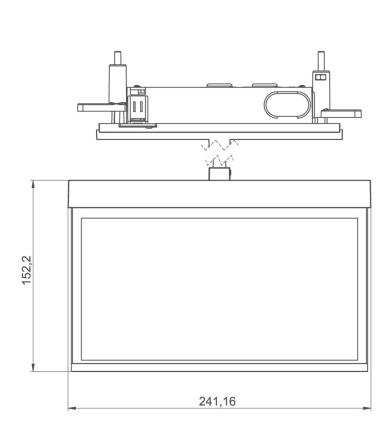

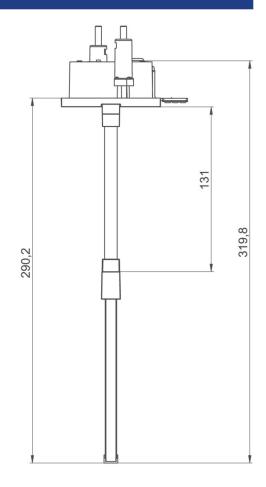

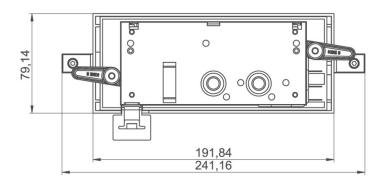

ACCESSORY LIST

AM-XBE -

AM-X-PKG -





RELATED PRODUCTS

| ArtNo. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote main- tenance | max. luminai- res | Single luminai- re monitoring |
|------------------|-------------|---------------------|----------------|-----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| AMCP003SC- AZ | ₹ → | SelfControl (SC) | Single battery | RAL 7016 | € | no | high | no | unlimited | itself |
| AMCP003SC-E | (-1) | SelfControl (SC) | Single battery | Edelstahl | € | no | high | no | unlimited | itself |

As of: 14.05.2025 - Subject to technical changes and errors.