



**Art.-Nr: AMCP509CC-E-SCHRACK**

**Exit sign Centralised power supply systems**

**Pendant recessed ceiling, CoreCompact 24 (CC), CPS, 22 m, IP20, Zinc die-cast, Stainless steel**

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/AMCP509CC-E-SCHRACK](http://www.rp-group.com/en/item/AMCP509CC-E-SCHRACK)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Pendant recessed ceiling         |
| Recognition distance   | 22 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Stainless steel                  |
| Protection type (IP)   | IP20                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | CoreCompact 24 (CC)              |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Non-maintained / maintained      |
| Input voltage AC       | 24 V                             |



|   |                     |
|---|---------------------|
| Power max.                              | 2,8 W               |
| Power maintained                        | 2,8 W               |
| Power non-maintained                    | 0,4 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 79 mm               |
| Width                                   | 241 mm              |
| Height                                  | 159 mm              |
| Installation length                     | 176 mm              |
| Installation width                      | 68 mm               |
| Installation height                     | 40 mm               |
| Weight                                  | 1.21                |
| Weight incl. packaging                  | 1.57                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | No                  |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Luminous flux mains                     | 165 lm              |
| Luminous flux emergency                 | 165 lm              |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4260682156235       |



## TECHNICAL DRAWING

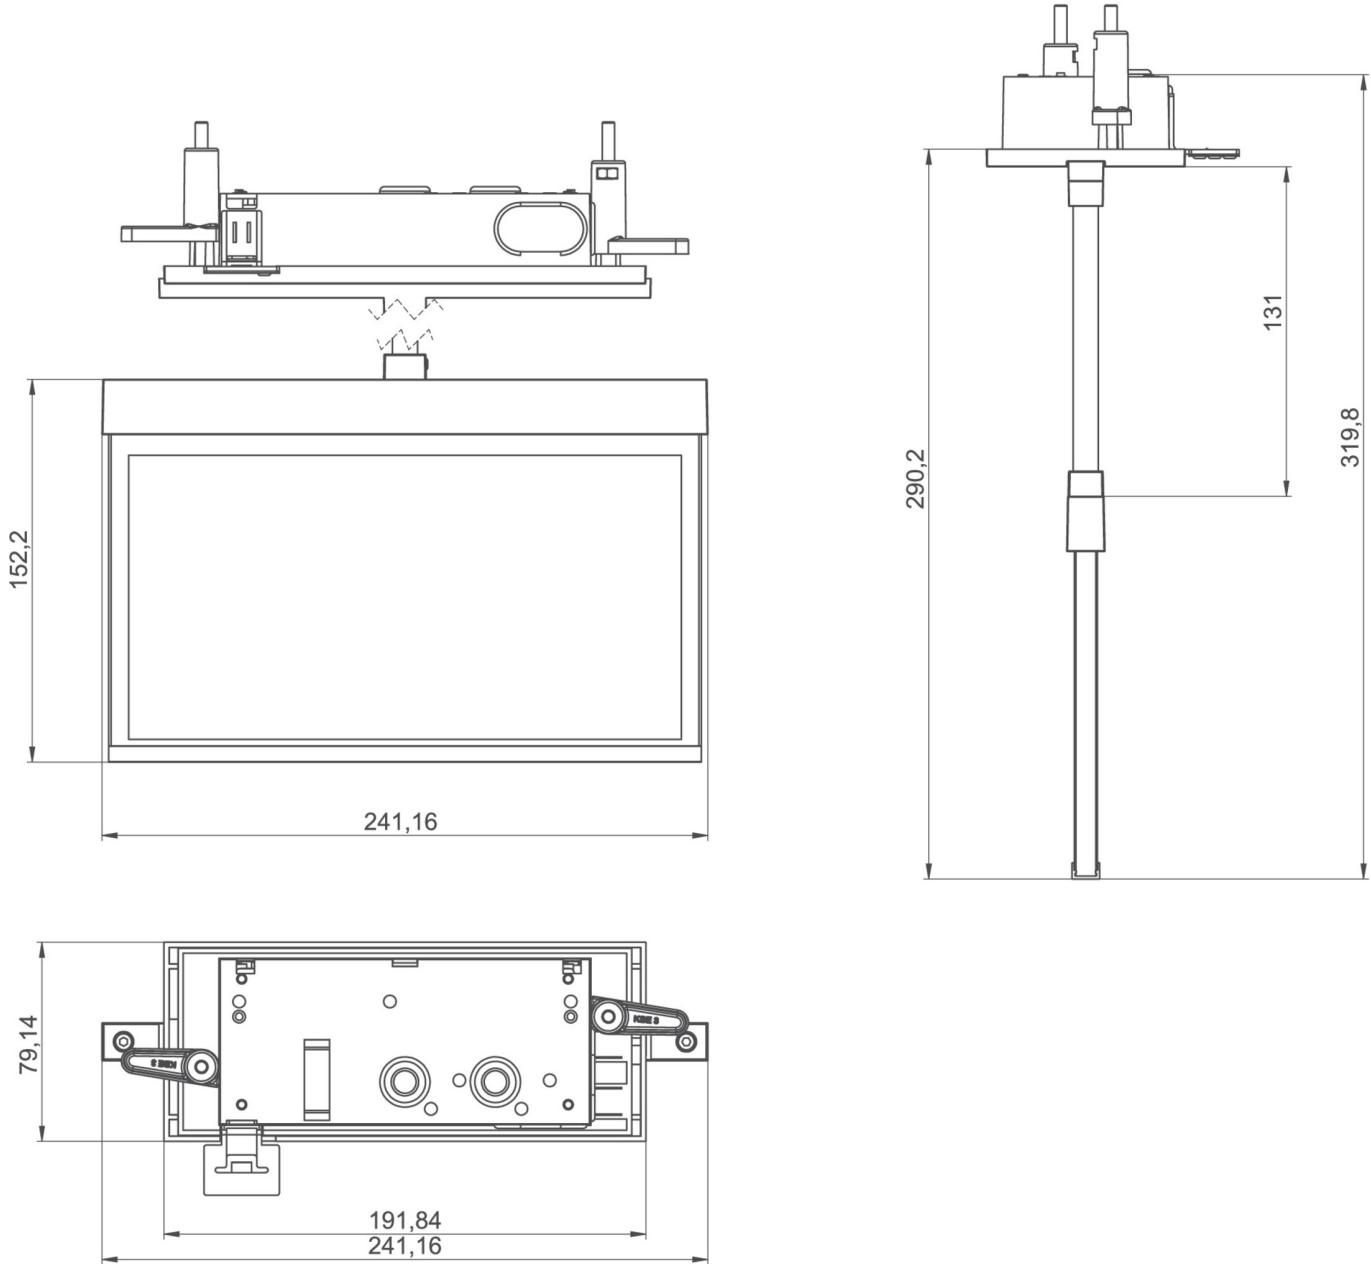

## ACCESSORY LIST

AM-XBE -

AM-X-PKG - Precision ball joint for square pendulums – tilt compensation up to 23°

As of: 09.02.2026 - Subject to technical changes and errors.