



Art.-Nr: AMEP009-E

Exit sign Centralised power supply systems

**Pendant recessed ceiling, Without monitoring, CPS, 22 m,
IP20, Zinc die-cast, Stainless steel**

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. With an installation diameter of 68 mm, this luminaire can be easily integrated into many environments. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/AMEP009-E



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Pendant recessed ceiling
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Stainless steel
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V



Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	4,5 W
Power maintained	4,5 W
Power non-maintained	0 W
Ambient temperature maintained mode	-25 °C to 40 °C
Ambient temperature non-maintained mode	-25 °C to 40 °C
Depth	92 mm
Width	236 mm
Height	291 mm
Installation dimensions Diameter	68 mm
Weight	1.25
Weight incl. packaging	1.61
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Customs tariff number	94056180
EAN	4260581714222



Technical drawing of the Eclair 1000 LED light fixture, showing dimensions in millimeters (mm).

Top View:


- Overall width: 92 mm
- Overall height: 92 mm
- Central circular opening: $\phi 78$ Deckenloch
- Four mounting tabs are visible, each with a screw hole.

Front View:

- Overall height: 292 mm
- Height of the main body: 152 mm
- Width of the main body: 236 mm
- Width of the base: 241 mm

Side View:

- Height of the mounting bracket: 34 mm
- Minimum installation depth: 2 min. Einbau
- Maximum installation depth: 21 max. Einbau
- Height of the main body: 15 mm
- Width of the main body: 11 mm

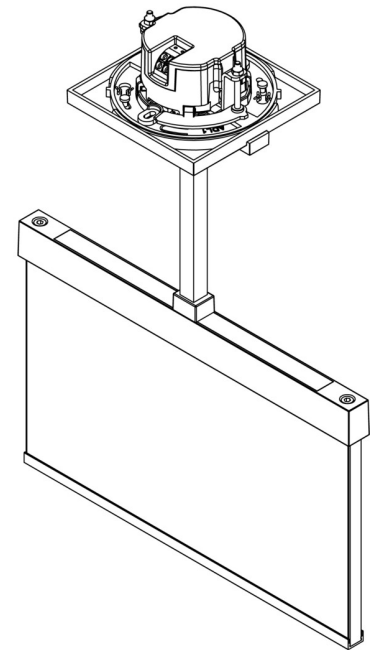

AM-X-PKG -

www.rp-group.com