



### Art.-Nr: AMW001SC-AZ Exit sign Self-contained Wall mounting, SelfControl (SC), 1 h, 22 m, IP40, Zinc diecast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AMW001SC-A7



#### **TECHNICAL DATA**

| Luminaire type         | Exit sign                   |  |  |  |
|------------------------|-----------------------------|--|--|--|
| Mounting               | Wall mounting               |  |  |  |
| Recognition distance   | 22 m                        |  |  |  |
| Pictograph             | Set                         |  |  |  |
| Illuminant             | LED                         |  |  |  |
| Housing material       | Zinc die-cast               |  |  |  |
| Housing color          | Anthracite                  |  |  |  |
| Protection type (IP)   | IP40                        |  |  |  |
| Impact resistance (IK) | ≥ 3                         |  |  |  |
| Certification          | WEEE, CE                    |  |  |  |
| Insulation class       | 2                           |  |  |  |
| Supply                 | Self-contained              |  |  |  |
| Monitoring             | SelfControl (SC)            |  |  |  |
| Bridging time          | 1 h                         |  |  |  |
| Battery                | NIMH 4,8 V/2,0 Ah           |  |  |  |
| Operating mode         | Non-maintained / maintained |  |  |  |
| Input voltageAC        | 230 V                       |  |  |  |






| Input frequency                         | 50 / 60 Hz     |  |  |  |  |
|---|----------------|--|--|--|--|
| Power max.                              | 4,7 W          |  |  |  |  |
| Power maintained                        | 4,7 W          |  |  |  |  |
| Power non-maintained                    | 1,95 W         |  |  |  |  |
| Ambient temperature maintained mode     | -5 °C to 40 °C |  |  |  |  |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |  |  |  |  |
| Depth                                   | 50 mm          |  |  |  |  |
| Width                                   | 236 mm         |  |  |  |  |
| Height                                  | 151 mm         |  |  |  |  |
| Weight                                  | 1.37           |  |  |  |  |
| Weight incl. packaging                  | 1.73           |  |  |  |  |
| Connection cross-section                | 2.5 mm²        |  |  |  |  |
| Switching input                         | Yes            |  |  |  |  |
| Emergency light blocking                | Yes            |  |  |  |  |
| Battery connection                      | Connector      |  |  |  |  |
| Dimming function                        | Yes            |  |  |  |  |
| Customs tariff number                   | 94056180       |  |  |  |  |
| EAN                                     | 4260682142979  |  |  |  |  |





# TECHNICAL DRAWING

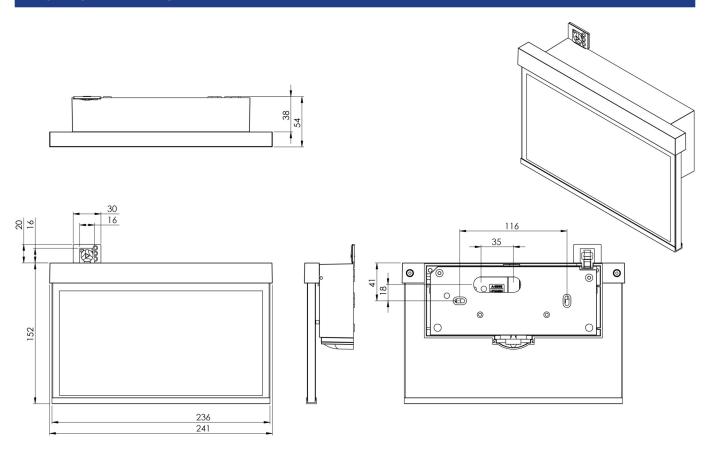

## **ACCESSORY LIST**

BALLPLX-AM -

AM-X-APA - Surface-mounted adapter AM/AX

## RELATED PRODUCTS

| ArtNo.     | Image    | Monitoring          | Supply         | Color     | Investment | Automatic log | Maintenance<br>level | Remote main-<br>tenance | max. luminai-<br>res | Single luminai-<br>re monitoring |
|------------|----------|---------------------|----------------|-----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| AMW001SC   | <b>₹</b> | SelfControl<br>(SC) | Single battery | RAL 9003  | €          | no            | high                 | no                      | unlimited            | itself                           |
| AMW001SC-E | <b>A</b> | SelfControl<br>(SC) | Single battery | Edelstahl | €          | no            | high                 | no                      | unlimited            | itself                           |

As of: 27.05.2025 - Subject to technical changes and errors.