



### Art.-Nr: AMW008SC-AZ Exit sign Self-contained Wall mounting, SelfControl (SC), 8 h, 22 m, IP40, Zinc diecast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AMW008SC-



#### **TECHNICAL DATA**

| Luminaire type         | Exit sign                   |
|------------------------|-----------------------------|
|                        |                             |
| Mounting               | Wall mounting               |
| Recognition distance   | 22 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Zinc die-cast               |
| Housing color          | Anthracite                  |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | ≥ 3                         |
| Certification          | WEEE, CE                    |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 8 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltageAC        | 230 V                       |






| Input frequency                         | 50 / 60 Hz     |  |  |  |  |
|---|----------------|--|--|--|--|
| Power max.                              | 4,6 W          |  |  |  |  |
| Power maintained                        | 3,4 W          |  |  |  |  |
| Power non-maintained                    | 0,35 W         |  |  |  |  |
| Ambient temperature maintained mode     | -5 °C to 40 °C |  |  |  |  |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |  |  |  |  |
| Depth                                   | 50 mm          |  |  |  |  |
| Width                                   | 236 mm         |  |  |  |  |
| Height                                  | 151 mm         |  |  |  |  |
| Weight                                  | 1.37           |  |  |  |  |
| Weight incl. packaging                  | 1.73           |  |  |  |  |
| Connection cross-section                | 2.5 mm²        |  |  |  |  |
| Switching input                         | Yes            |  |  |  |  |
| Emergency light blocking                | Yes            |  |  |  |  |
| Battery connection                      | Connector      |  |  |  |  |
| Dimming function                        | Yes            |  |  |  |  |
| Customs tariff number                   | 94056180       |  |  |  |  |
| EAN                                     | 4260581714789  |  |  |  |  |





# TECHNICAL DRAWING

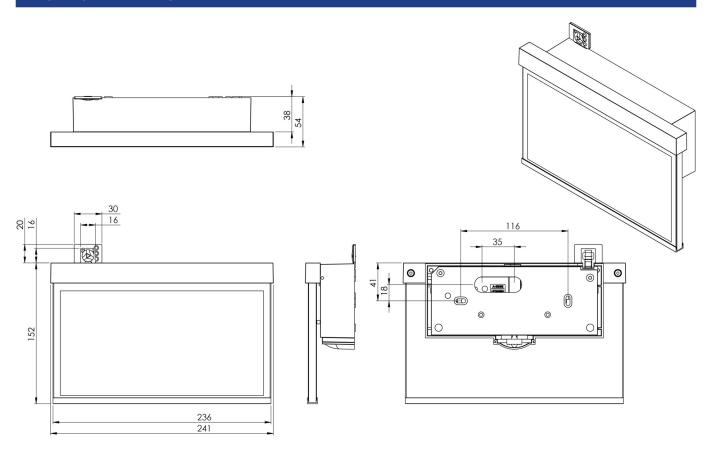

## **ACCESSORY LIST**

BALLPLX-AM -

AM-X-APA - Surface-mounted adapter AM/AX

## RELATED PRODUCTS

| ArtNo.          | Image      | Monitoring                      | Supply         | Color     | Investment | Automatic log | Maintenance<br>level | Remote main-<br>tenance | max. luminai-<br>res | Single luminai-<br>re monitoring |
|-----------------|------------|---------------------------------|----------------|-----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| AMW008SC-E      | <b>3</b> > | SelfControl<br>(SC)             | Single battery | Edelstahl | €          | no            | high                 | no                      | unlimited            | itself                           |
| AMW408WL-<br>AZ | <b>F</b>   | Wireless Pro-<br>fessional (WL) | Single battery | RAL 7016  | €€         | yes           | low                  | yes                     | 1,000 per system     | central                          |

As of: 14.05.2025 - Subject to technical changes and errors.