



### Art.-Nr: AMW401WL Exit sign Self-contained Wall mounting, Wireless Professional (WL), 1 h, 22 m, IP40, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.







More information www.rp-group.com/en/item/AMW401WL



### **TECHNICAL DATA**

Luminaire type	Exit sign			
Mounting	Wall mounting			
Recognition distance	22 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	White			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE, 5 years warranty			
Insulation class	2			
Supply	Self-contained			
Monitoring	Wireless Professional (WL)			
Bridging time	1 h			
Battery	LiFePO4 6,4 V/1,2 Ah			
Operating mode	Non-maintained / maintained			
Input voltageAC	230 V			






Input frequency	50 Hz			
Power max.	4,7 W			
Power maintained	3,5 W			
Power non-maintained	0,8 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	50 mm			
Width	236 mm			
Height	151 mm			
Weight	1.4			
Weight incl. packaging	1.76			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260682153357			





# **TECHNICAL DRAWING**

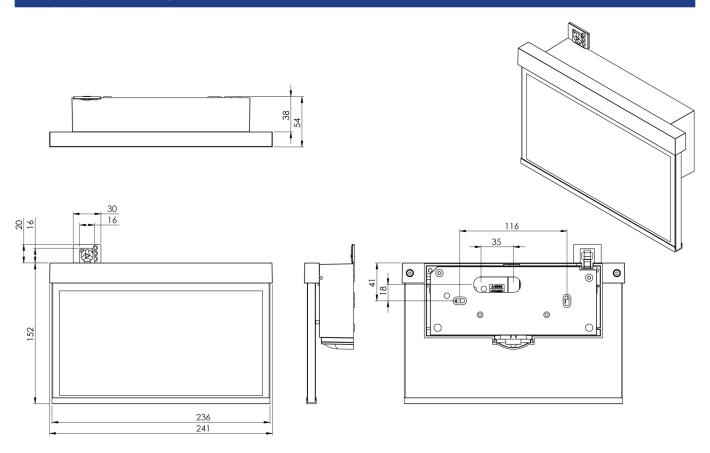

# ACCESSORY LIST

BALLPLX-AM -

AM-X-APA - Surface-mounted adapter AM/AX

LFP3212.K-SET-2AKKU - Battery

# RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMW401WL- AZ	<b>₹</b>	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central
AMW401WL-E	<b>A</b>	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 16.04.2025 - Subject to technical changes and errors.