



Art.-Nr: AMW403WL Exit sign Self-contained Wall mounting, Wireless Professional (WL), 3 h, 22 m, IP40, Zinc die-cast, White

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information www.rp-group.com/en/item/AMW403WL



TECHNICAL DATA

CE

Luminaire type	Exit sign				
Mounting	Wall mounting				
Recognition distance	22 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	White				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE, 5 years warranty				
Insulation class	2				
Supply	Self-contained				
Monitoring	Wireless Professional (WL)				
Bridging time	3 h				
Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Non-maintained / maintained				
Input voltageAC	230 V				






Input frequency	50 Hz				
Power max.	4,7 W				
Power maintained	3,5 W				
Power non-maintained	0,8 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	50 mm				
Width	236 mm				
Height	151 mm				
Weight	1.4				
Weight incl. packaging	1.76				
Connection cross-section	2.5 mm ²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682153371				





TECHNICAL DRAWING

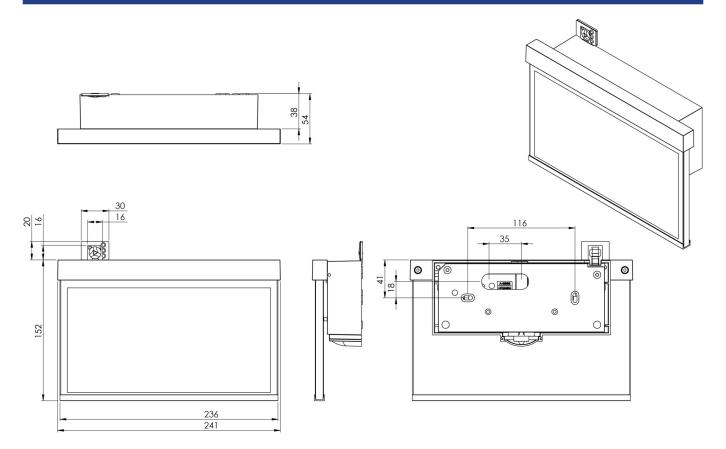

ACCESSORY LIST

BALLPLX-AM -AM-X-APA - Surface-mounted adapter AM/AX

LFP3212.K-SET-2AKKU - Battery

RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMW403WL- AZ	₹ →	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per sys- tem	central
AMW403WL-E	$\overline{\mathcal{A}}$	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per sys- tem	central

As of: 16.04.2025 - Subject to technical changes and errors.