



Art.-Nr: AMW509CC-AZ Exit sign Centralised power supply systems Wall mounting, CoreCompact 24 (CC), CPS, 22 m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information www.rp-group.com/en/item/AMW509CC-A7



TECHNICAL DATA

Luminaire type	Exit sign				
Mounting	Wall mounting				
Recognition distance	22 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Zinc die-cast				
Housing color	Anthracite				
Protection type (IP)	IP40				
Impact resistance (IK)	≥ 3				
Certification	WEEE, CE				
Insulation class	2				
Supply	Centralised power supply systems				
Monitoring	CoreCompact 24 (CC)				
Bridging time	CPS				
Battery	/				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	24 V				






Power max.	2,8 W			
Power maintained	2,8 W			
Power non-maintained	0,4 W			
Ambient temperature maintained mode	-5 °C to 40 °C			
Ambient temperature non-maintained mode	-5 °C to 40 °C			
Depth	50 mm			
Width	236 mm			
Height	151 mm			
Weight	1.18			
Weight incl. packaging	1.54			
Connection cross-section	2.5 mm²			
Switching input	No			
Emergency light blocking	No			
Battery connection	No			
Luminous flux mains	165 lm			
Luminous flux emergency	165 lm			
Customs tariff number	94056180			
EAN	4260682156525			





TECHNICAL DRAWING

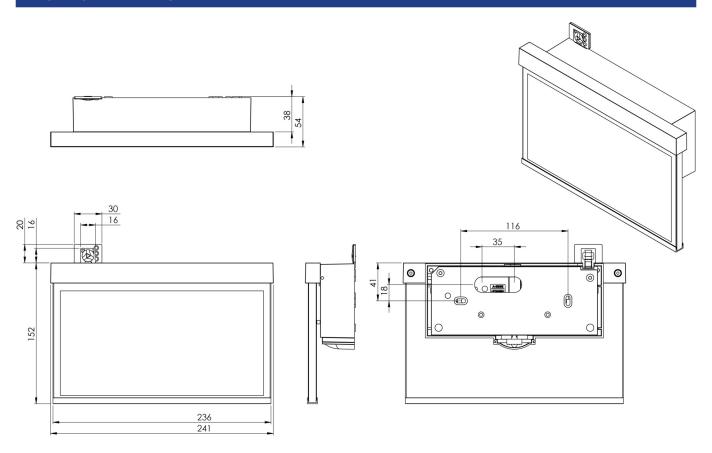

ACCESSORY LIST

BALLPLX-AM -

AM-X-APA - Surface-mounted adapter AM/AX





RELATED PRODUCTS

ArtNo.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMW009ML	3	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
AMW009ML- AZ	**	Central power supply (ML)	Central power supply	RAL 7016	€€€	Yes	low	Yes	1,920 per system	central
AMW009ML-E	**	Central power supply (ML)	Central power supply	Edelstahl	€€€	Yes	low	Yes	1,920 per system	central
AMW509CC	3	CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
AMW509CC-E	₹	CoreCompact 24 (CC)	Central power supply	Edelstahl	€€	Yes	low	Yes		central

As of: 12.02.2025 - Subject to technical changes and errors.