



Art.-Nr: AMWA008SC-E Exit sign Self-contained Wall construction flag, SelfControl (SC), 8 h, 22 m, IP40, Zinc die-cast, Stainless steel

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



((

More information www.rp-group.com/en/item/AMWA008SC-F



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Wall construction flag			
Recognition distance	22 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	Stainless steel			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE			
Insulation class	2			
Supply	Self-contained			
Monitoring	SelfControl (SC)			
Bridging time	8 h			
Battery	NIMH 4,8 V/2,0 Ah			
Operating mode	Non-maintained / maintained			
Input voltageAC	230 V			







Input frequency	50 / 60 Hz				
Power max.	4,6 W				
Power maintained	3,4 W				
Power non-maintained	0,35 W				
Ambient temperature maintained mode	-5 °C to 40 °C				
Ambient temperature non-maintained mode	-5 °C to 40 °C				
Depth	80 mm				
Width	334 mm				
Height	196 mm				
Weight	1.6				
Weight incl. packaging	1.96				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260581714673				





TECHNICAL DRAWING

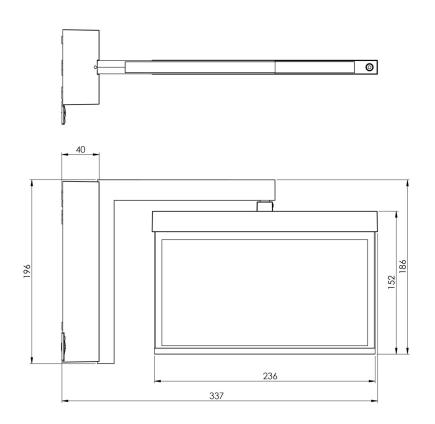

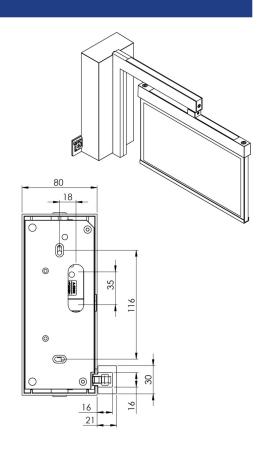

ACCESSORY LIST

AM-X-APA - Surface-mounted adapter AM/AX

RELATED PRODUCTS

ArtNo	o.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMWA	A008SC	₹	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
AMWA AZ	4008SC-	3 →	SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself

As of: 14.05.2025 - Subject to technical changes and errors.